

From seeding to detachment: leveraging deep learning to quantify the transport of tyre wear microplastics in a wind tunnel

Bashir Olasunkanmi Ayinde¹, Wolfgang Babel^{1,2}, Johannes Olesch^{1,2}, Daniel Wagner³, Seema Agarwal³, Christian Laforsch⁴, Julian Brehm⁴, Anke Nölscher^{5,*}, and Christoph Karl Thomas^{1,2}

¹Micrometeorology Group, University of Bayreuth, Germany

²Bayreuth Center for Ecology and Environmental Research, University of Bayreuth, Germany

³Department of Macromolecular Chemistry II, University of Bayreuth, Germany

⁴Chair of Animal Ecology I, University of Bayreuth, Germany

⁵Atmospheric Chemistry, Bayreuth Center of Ecology and Environmental Research (BayCEER), University of Bayreuth, Bayreuth, Germany


*now at: Institute of Climate and Energy Systems, ICE-3: Troposphere, Forschungszentrum Jülich GmbH, Jülich, Germany, and Institute of Geophysics and Meteorology, University of Cologne, Cologne, Germany

Correspondence: Bashir Olasunkanmi Ayinde (Bashir.Ayinde@uni-bayreuth.de)

Abstract. The transport dynamics of tyre wear particles (TWP)s remain poorly understood despite their recognized contribution to airborne microplastic (MP) pollution. This study addresses pollution. We address this gap by experimentally quantifying the TWP detachment rate and threshold friction velocities (u_*^{th}) investigating how idealized tyre wear particles detach from an idealized reference surface. Detachment under controlled wind-tunnel conditions. Our study aimed at simplifying the system and isolating the fundamental mechanisms controlling how particle size and shape influence preferential detachment. These experiments were conducted in a boundary layer wind tunnel over glass substrates seeded with a near-monolayer of particles, where a near monolayer of particles was seeded onto glass substrates. Time resolved imaging at 0.1 Hz was combined with automatic particle detachment and segmentation using an open-source You Only Look Once version 8 nano (YoloV8n) image analysis using a deep learning open source segmentation model, which allowed individual detachment events and particle allows for detecting individual particles, quantifying their detachment, and tracking their size and shape to be tracked with a mean average precision at an intersection-over-union threshold of 0.5 (mAP@50) above 85% for both the bounding box and mask outputs with high model accuracy. For the detachment experiments, pristine tyre wear particles generated on a laboratory test stand with car test tyre were supplied by Continental Reifen Deutschland GmbH, providing a well characterized and idealized TWP source. To seed the TWPs onto the glass substrates before exposure to the wind tunnel flow particle source. Among the seeding methods tested, we identified the a low-cost pressurised seeding approach as the most suitable method among those tested, as it pressurized seeding approach to produced the most uniform and reproducible particle distribution for subsequent detachment analysis. Across the analyzed size range (80 to 300 μm), larger and more irregularly shaped particles exhibited significantly higher detachment (u_*^{th}) significant higher threshold friction velocities for detachment than smaller and more rounded fragments particles. Ensemble fits yield a bulk u_*^{th} threshold friction velocity of approximately 0.26 m s^{-1} , with size and shape resolved u_*^{th} values varying by roughly detachment threshold velocity values varying a factor of approximately 1.3 between the most easily detached and most resistant particle size and shape classes. The application of the Shao and Lu

semi-empirical fluid threshold model reproduced the size-dependent u_{*}^{th} -threshold friction velocity of smooth polyethylene (PE)-microsphere, but underestimates the TWP- u_{*}^{th} that of tyre wear particle unless the effective cohesion and/or aerodynamic scaling parameter is increased beyond values typically used for dust and sand. This behaviour is consistent with TWPs-tyre wear particles experiencing stronger effective adhesion than smooth, spherical grains of similar size, due to their irregular morphology and multiple contact points with the substrate. The density differences between TWPs-the tyre wear particles ($\sim 1300 \text{ kg m}^{-3}$) and microspheres ($\sim 1025 \text{ kg m}^{-3}$) showed negligible influence within the studied size range (106 to 125 μm). We conclude that particle morphology, incorporating both size and shape, plays a dominant role in controlling the aerodynamic detachment of TWPs-on-from the idealized glass substrate, while density effects are secondary under the tested conditions. Because controlled laboratory studies using well defined particles and simplified surfaces are a necessary step towards isolating these fundamental mechanisms, our findings provide insights for improving MP-and-TWP-microplastic and tyre wear particle resuspension models and highlight the need for future studies on more realistic environmental surfaces and broader particle sizes and density ranges.

Graphical Abstract

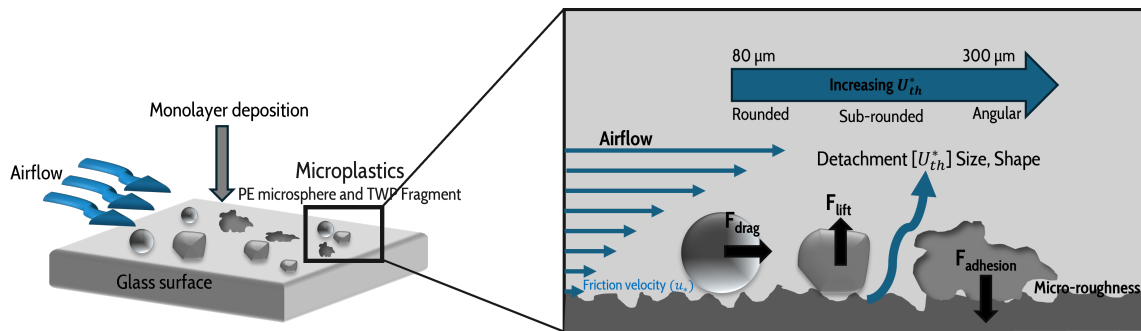

1 Introduction

Microplastics (MPs), defined as plastic particles smaller than 5 mm are among the highly discussed topics that have garnered significant global attention due to their ubiquitous nature in the environment (Arthur et al., 2009; Sundt et al., 2014). Although tyre wear particles (TWPs) have been recognized as pollutants since the late 1970s (Cadle and Williams, 1978), they were only recently identified as MPs (Sundt et al., 2014). Earlier studies on MPs primarily focused on microbeads from pharmaceuticals and personal care products (Gregory, 1996), as well as fragmentation and weathering of larger plastics. These particles find their way into all environmental compartments, having multifaceted impacts on the ecosystems, organisms, and human health (Luo et al., 2021; Osuoha et al., 2023; Piehl et al., 2018; Horton and Dixon, 2018; Laforsch et al., 2021). In recent years, more attention has been given to MPs in marine environments and their shorelines (Laglbauer et al., 2014; van Calcar and van Emmerik, 2019). However, as more research emerges on this interest, we see the need to investigate MP transports in other

45 environmental compartments, including the terrestrial ecosystem, urban air and non-exhaust traffic particles, thereby drawing more attention to additional, less obvious MP sources and materials, including TWPs (Laermanns et al., 2021; Bigalke et al., 2022; Järnlskog et al., 2022; Kernchen et al., 2024).

In the context of MPs, tyre and road wear particles (TRWP), are generated through the continuous friction between tyres and the road surfaces, releasing particulates of different sizes, shapes and compositions that can be transported by wind or runoff (Kreider et al., 2010; Baensch-Baltruschat et al., 2020; Beji et al., 2023; Bondorf et al., 2025). TRWPs constitute a complex mixture of diverse particulates (Gunawardana et al., 2012). Despite many studies already focused on the chemistry and morphology (Kreider et al., 2010; Sommer et al., 2018; Kim et al., 2021), eco-toxicology effects on human health (Wik et al., 2008; Marwood et al., 2011; Turner and Rice, 2010; Gualtieri et al., 2005), and overall emission rates of these particles (Hillenbrand et al., 2005; Lee et al., 2019; Mennekes and Nowack, 2022), there remains a notable gap in understanding their behaviour pre- and post-deposition onto various surfaces, including road surfaces and other structures. Particularly, the mechanism by which these particles detach from, move across, and get entrained from these surfaces into the fluid flow remains understudied, despite its significance in determining whether particles remain on the surface or become mobilized. In real road environments, this mobilization is driven not only by aerodynamic forcing but also by a combination of mechanical forcings, including tyre passage, vehicle-induced vibrations and wake turbulence (Hesse et al., 2022).

60 Similarly to dust and other MP particulate transport, multiple factors, including inherent entrainment forces such as aerodynamic drag and lift and stabilizing forces such as adhesion, cohesion, electrostatic, and gravity, act at the interface between particles and the substrate, thus influencing the detachment behaviour of TWPs (Grigoratos and Martini, 2015; Esders et al., 2023). Existing studies on the aeolian dynamics and mechanisms governing MP detachment, resuspension, and deposition under simulated free stream velocity and surface conditions have relied on using numerical models and experimental methods, which evolved from erosion modelling (Chepil, 1945; Shao and Li, 1999; Liu et al., 2019). Due to their simplicity and convenience, most experimental designs and models assume or sometimes prefer to use particles that are spherical in nature (Shao and Lu, 2000; Ibrahim et al., 2003). For instance, Esders et al. (2023) studied how microsphere to microsphere collisions affect detachment behaviour of borosilicate and polyethylene (PE) particles of various sizes on glass substrate. They pointed out that collision plays a critical role in modulating the detachment threshold of these microspheres. The effect of surface roughness of substrates and particle sizes significantly influences the detachment threshold to mobilize and transport particles from surfaces, as studied by Kassab et al. (2013). On the contrary, perfect spherical particles are rare in environmental settings (Olivares et al., 2024), and the balance of forces could further be complicated by the irregular nature of particles which do not conform to the spherical assumptions. Interestingly, Olivares et al. (2024) performed experimental studies using irregular and flat-shaped micro particles, corroborated with a Monte Carlo simulation model. Their results highlighted that while smaller irregular particles may exhibit higher removal efficiency, the overall removal fraction of irregularly shaped particles remains significantly lower than that of glass microspheres of similar cohorts subjected to identical aerodynamic forces.

Understanding the importance of the threshold friction velocity (u_*^{th}) value is critical in particle detachment, as it represents the minimum wind-induced stress required to overcome adhesive and gravitational forces and initiate particle migration. Shao and Lu (2000) provided a theoretical force balance model for predicting this threshold, originally formulated for spherical

80 particles. They explicitly account for how cohesive forces such as van der Waals and electrostatic forces can dominate for smaller particles, while gravitational forces become more significant for larger ones. By balancing these forces against the aerodynamic forces, the particle type threshold friction velocity can be predicted. Despite this model being validated primarily on spherical particles with experimental observations, it remains a core force balance framework which can be adopted for non-spherical particles (Del Bello et al., 2021). However, for particles with non-spherical geometries, such as those from tyre wear, 85 it is important to evaluate theoretical models of predicting these threshold values by using experimental results for different particle sizes and shapes.

Particle detachment is further complicated by spatial variations in how particles are deposited on the substrate, such as clustering, agglomeration, and differences in particle number density. These deposition characteristics are influenced by the seeding method and can affect the uniformity and reproducibility of detachment experiments. 'Various seeding approaches 90 have been used in dust and powder depositional studies, including dust cloud producer (Goossens and Van Kerschaever, 1999), injection and fan mixing (Jiang et al., 2011), and some advanced pressurized solutions (e.g. the PALAS RBG 1000; Theron et al., 2020), to achieve a uniform, near monolayer deposit with minimal agglomerates. Some conventional seeding techniques, such as tipping and sieving, have also been used due to their low cost and simplicity (Qasem et al., 2011; Beattie et al., 2012; Chanchangi et al., 2020). The deposited particles often settle in clusters, thereby introducing bias in predicting the threshold 95 velocity needed to dislodge particles. Consequently, to address the inherent limitations of these conventional approaches, we implemented a cost-effective and efficient alternative that achieves near-monolayer deposition with reduced agglomeration while being uniformly distributed, offering a more realistic, yet controlled solution for particle deposition on test surfaces.

Most previous detachment studies have employed traditional image processing approaches to detect and count particles frame by frame. For instance, Esders et al. (2022) applied an algorithm requiring colour intensity thresholding to quantitatively 100 determine the number of microspheres in each frame. Similarly, an optical microscope system coupled with image analysis software, which also employs binary thresholding and water segmentation, has been used to quantify detached microspheres (Barth et al., 2014). However, this approach can be more time-consuming, prone to operator bias, and may lack the precision required for accurately identifying individual particles with complex shapes (Marsh et al., 2018; Zhu et al., 2021). Consequently, accurately detecting and quantifying MPs can be challenging without the use of more complex image processing or 105 costly optical systems. Recently, the application of deep learning to environmental pollution research has expanded considerably (Astorayme et al., 2024; Ayinde et al., 2024; Zailan et al., 2022; Zhao et al., 2024), with growing focus on detection, segmentation, and quantitative characterization of particulate pollutants and plastic debris in microscopic images (Zeng et al., 2021; Chazhoor et al., 2022; Thammasanya et al., 2024; Liang et al., 2023; Jia et al., 2024).

Convolutional neural networks (CNNs) underpin many of these deep learning models, enabling them to learn hierarchi- 110 cal feature representations that excel at detecting and delineating objects against complex backgrounds (Benali Amjoud and Amrouch, 2020). ~~The use of~~ CNN-based architectures have performed relatively well in classifying plastic waste (Chazhoor et al., 2022). We here underscore the breakthrough of these models in discerning smaller particles in the form of MPs. Xu and Wang (2024) used U-Net-based instance segmentation models to accurately segment MPs collected from water, reporting segmentation accuracies above 91 %. Strikingly, MP particles within the range of 1 – 10 μm performed relatively well using

115 an exposure time of 0.4 s and confidence level reaching an approximate of ~~85.47%~~ 85% (Lim et al., 2024). Notably, 'You Only Look Once (Yolo)' architectures have gained widespread recognition for their speed, accuracy, and flexibility in both object detection and instance segmentation (Firdauz et al., 2023; Li et al., 2023; Xu et al., 2023). The latest generation, Yolo Version 8 developed in January 2023, offers enhanced performance, making it well-suited for various image processing tasks. ~~Previously, other YOLO version has been used for Image detection and segmentation task, however more features are been~~
120 ~~added to improve on the model framework, and thus make it better, as more versions emerged (Lee et al., 2019; ?), which has also been utilized by comparing different variant for detecting and categorizing MPs in the marine environment (?).~~ While deep learning techniques have seen growing use in MP studies, their application to ~~understanding the processes of atmospheric~~ detachment and resuspension processes remains unexplored.

To address these limitations, we employ the state of the art deep learning based instance segmentation model YoloV8nano
125 (YoloV8n); which detects individual TWPs as separate objects and delineates their pixel-level boundaries, to quantify the detachment dynamics of these particles. This enables us to characterize and compare the spatial deposition pattern and their influence on detachment behaviour, thereby helping to bridge the existing knowledge gap and enhancing our understanding of how TWPs behave on near real-world surfaces. In light of these scientific needs, our research aimed to advance the experimental analysis of TWP detachment, with a special focus on TWPs generated on a laboratory test stand from a car tyre and deposited
130 on a laboratory-standard dry glass substrate. This simplified and well characterized particle-surface system is meant to serve as a reference for comparing the results from idealized spherical particles with those for TWP. It also minimizes additional complexities present in real-world environments, including the road dust, surface heterogeneity, and environmental ageing, thereby establishing a mechanistic baseline to help improve the representation of TWP mobilization in environmental transport models. The objective of this study is to isolate the fundamental ~~mechanism~~ mechanisms controlling TWP detachment under
135 idealized laboratory conditions. In order to achieve this, we examine which seeding method best achieves a representative and uniform deposition of TWPs on glass substrates, how evolving aerodynamic conditions impact the detachment rates of TWPs, in contrast with microspheres of the same group, and whether particle shape significantly alter the threshold friction velocity required for detachment.

~~This study is the first to experimentally investigate the detachment of TWPs from surfaces in a laboratory wind tunnel~~
140 ~~, providing an idealized, controlled environment, and to utilize deep learning techniques to analyze particle behaviour in turbulent flows.~~ Although this setup does not reproduce the full complexity of real road environments, it provides a controlled mechanistic baseline for investigating whether particle morphology, particularly size and shape governs preferential detachment under prescribed aerodynamic forcing. As a first controlled experimental wind tunnel study of TWP detachment, the value of these findings lies not in providing threshold values directly applicable in this field, but in identifying the physical mechanism that control the preferential detachment under idealized conditions. Answering these ~~questions~~ fundamental questions first is crucial for enhancing our understanding of how MP and TWPs ~~transport, particularly regarding their behaviour and migration~~ are mobilized from surface-bound deposits before entrainment ~~into the air.~~
and redistribution in the environment.

2 Methodology

150 Conventional image processing techniques have been widely adapted in detachment studies to detect particle images and analyze detachment under turbulent flow conditions in wind tunnels. However, these approaches require extensive manual preprocessing to reduce noise and capture key features, which may introduce subjective choices and be time-consuming when applied frame by frame to high-frequency image series. To overcome these shortcomings, we propose an integrated methodology that leverages advanced computer vision techniques to resolve particle detachment, including controlled particle seeding
155 and standardized image acquisition, optimized training, and retrospectively synchronized airflow measurements (Fig. 1). Although this flowchart provides a visual representation of the workflow, subsequent sections will elaborate on the experimental approaches employed in this study.

2.1 Wind tunnel experimental setup and particle seeding systems

The experiments were conducted in an open-circuit boundary layer wind tunnel (Fig. 2), which is identical to one used by
160 Esders et al. (2023). The wind tunnel is 730 cm long. The test section is approximately 300 cm long and has a rectangular cross-section measuring 54 cm $\times$ 27 cm. The inner walls of the wind tunnel are lined with polystyrene foam, and flow is controlled by a set of 12 fans of diameter 26.5 cm (RAB O TURBO 250, DALAP GmbH; Germany), supported by a stepless transformer (LSS 720-K, Thalheimer Transformatorenwerke GmbH, Germany) controlled and adjusted by an automated robotic system, which enabled smooth, continuous and reproducible variation of the output voltage up to the maximum level.
165 Ambient laboratory air is drawn into the tunnel by the fan system and passes through a honeycomb flow straightener to maintain uniform and well-conditioned flow conditions entering the contraction zone before entering the test section. The flow is subsequently discharged into the atmosphere. A HEPA filter (EU2 classification, 10 μm pore size; Erwin Telle GmbH, Germany) is installed at the outlet of the wind tunnel to remove residual particles from the flow before discharge into the outdoor air.

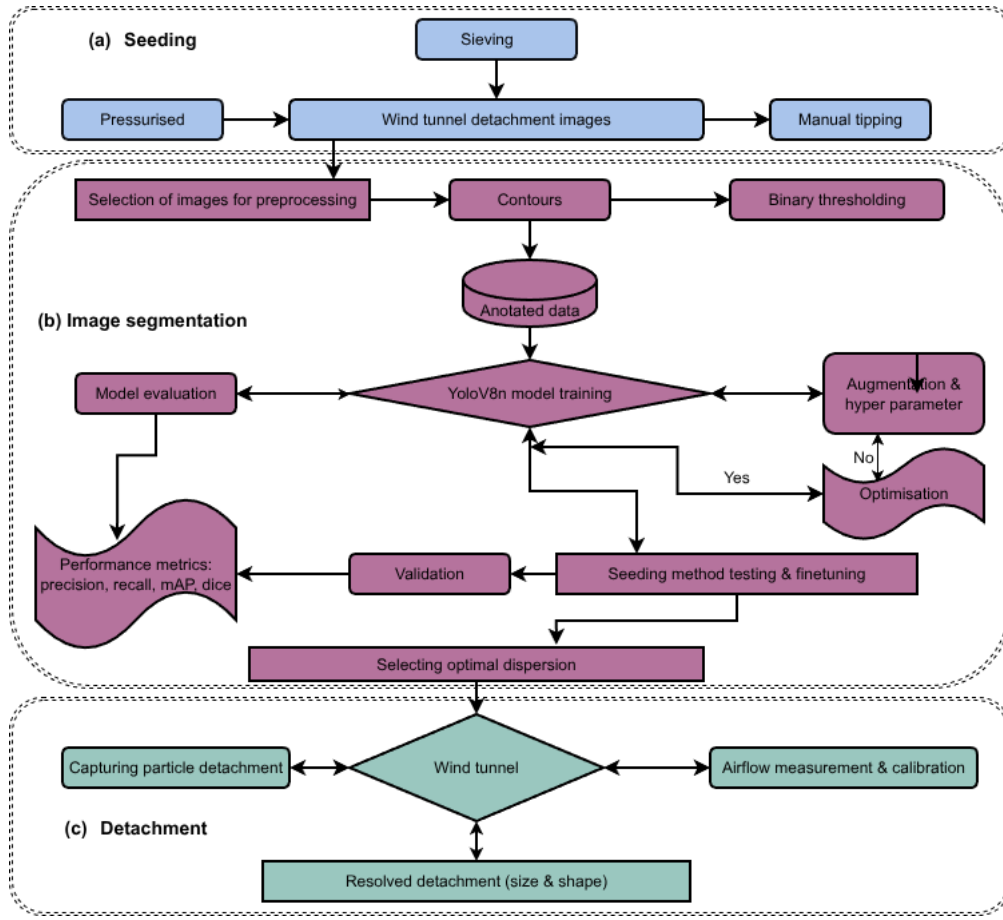


Figure 1. Overall structure of the experimental framework. This comprises three stages: (a) Seeding and high resolution image acquisition of particles via pressurized, sieving and tipping. (b) The deep learning-based image segmentation and model optimization. (c) Quantification of particle detachment and airflow measurement.

170 The upstream fetch length is approximately 170 cm long and covered with an aerodynamically smooth lining at the bottom, onto which passive roughness elements in the form of LEGO® bricks were placed in a symmetrical staggered pattern along the entire section of the test section to simulate the desired rough wall boundary conditions. To maintain a uniform surface consistency, a detachable substrate mount was positioned along the span of these roughness elements such that the mounted substrate was level with their height. The detachment experiments were conducted with standard laboratory glass slides (75 mm

175 × 25 mm), placed on the mount flush such that their upper surface was level with the surrounding roughness elements, with the long side oriented perpendicular to the streamwise flow direction. A high-resolution camera (Sony Alpha 7RII) equipped with a long-distance microscopy lens (CF-1 lens, K2 DistaMax Infinity, USA) was placed directly above the substrate mount with an adjustable object distance of approximately 35 cm to capture detachment events at 10 second interval, lit by a 50W LED strip to illuminate the test section uniformly. Moreover, a three-dimensional hot-wire constant temperature anemometer (model

180 55P095, Dantec dynamics), mounted on a traverse system, was used to measure turbulent airflow statistics. The probe was calibrated using a dedicated probe calibrator, with temperature correction applied during calibration. Directional sensitivity was accounted for using the default manufacturer's calibration coefficient. A pitot tube was used as the velocity reference during calibration, and the probe was manually aligned with the mean streamwise flow direction. A temperature probe for the constant-temperature anemometer system (model 90P10, Dantec Dynamics) was also installed. In addition, a combined
 185 relative humidity sensor and temperature sensor (Model HC2A, Rotronic) was installed to record the air temperature and relative humidity of the system and compare them across runs.

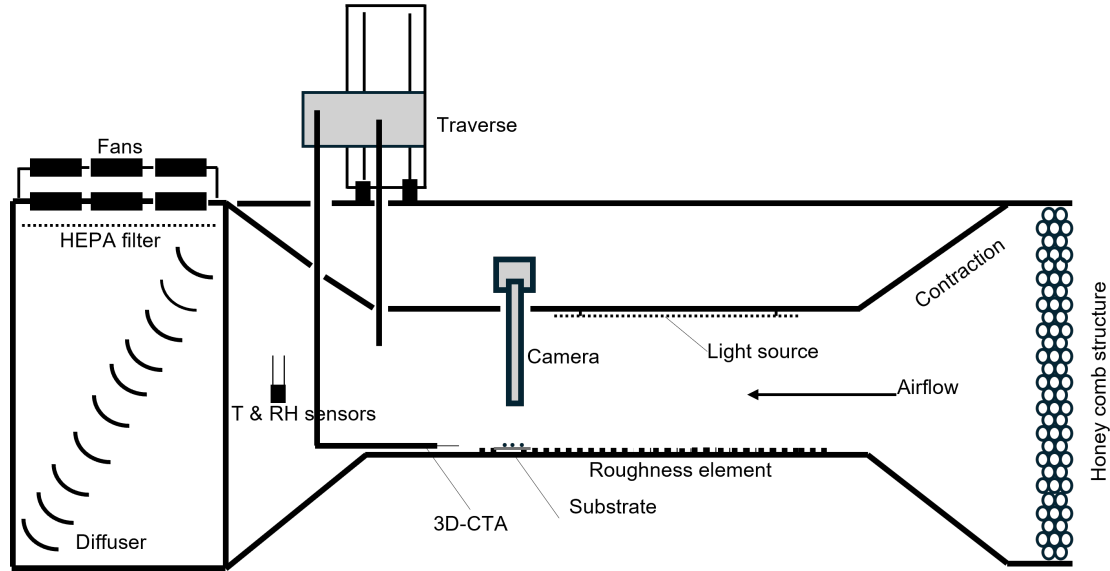


Figure 2. Diagram of the wind tunnel and test set up study the TWP detachment.

2.2 Tyre wear particles and reference polyethylene microspheres(~~PE115~~)

Pristine tyre wear particles (~~TWPs~~) used in this study were generated on a laboratory test stand supplied by Continental Reifen Deutschland GmbH. The material consists of tread-based compositions made from natural and synthetic rubber, with mineral fillers and standard additives, including components such as 6PPD and diphenylguanidine(~~DPG~~). The particles have
 190 not undergone road wear or environmental ageing and have not been mixed with road dust; therefore, they are treated as an idealized, well-characterized reference material. For the detachment experiments, TWPs from car test tyre were used. Additional particles from a truck-tyre composition were used only to increase the diversity of particle morphologies in the image dataset for training and optimizing the deep-learning framework. Representative high-resolution image of the car TWPs
 195 (Fig. 3) was obtained using a scanning electron microscope (SEM). These particles exhibit irregular shapes and jagged textures with numerous sharp edges and span a broad range of sizes and aspect ratios.

As a spherical reference, polyethylene (~~PE~~) microspheres of comparable size cohorts were used, with a density of approximately 1025 kg m^{-3} (Esders et al., 2023). SEM images of the ~~PE~~-polyethylene particles (see (Esders et al., 2023) show nearly

perfectly spherical microspheres with smooth surfaces, in clear contrast to the irregular TWP aggregate. The density of the car
200 TWPs is about 1300 kg m^{-3} , as specified by the manufacturer and consistent with values reported for comparable tyre and
tread wear particles (Klöckner et al., 2021).

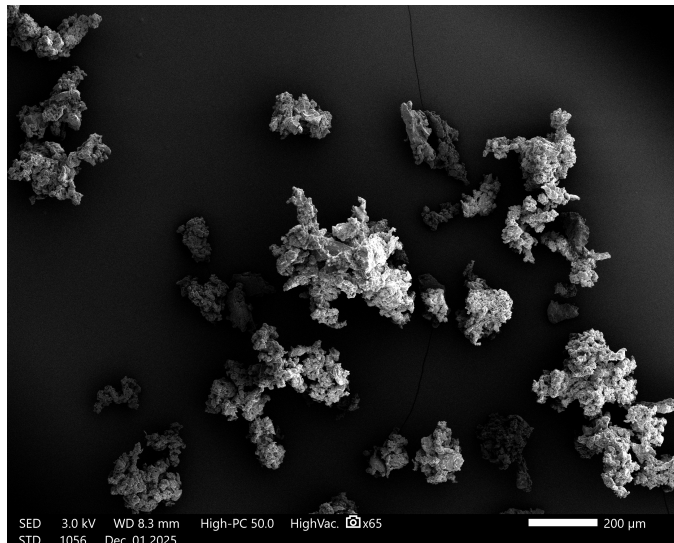


Figure 3. Scanning electronic microscopy image of car tyre wear particles.

2.3 Particle seeding methods and image acquisition

Prior to conducting the detachment experiments, three different particle seeding methods were evaluated for their ability to
deposit particles homogeneously and as a monolayer onto the test substrate. These methods were assessed with the aim of
205 minimizing particle agglomeration, which can introduce significant bias in detachment measurements if not properly controlled
(Kouadio et al., 2022). Some previous studies have used a simple cap tipping method for particle deposition. Among the recent
examples is the study by Esders et al. (2023), which employed this technique in MP detachment experiments using fluorescent
microspheres. In their method, microspheres were stored in a sealed vial, which was flipped once to allow some particles to
adhere to the inside of the cap. The cap was then unscrewed and gently tipped, allowing a small quantity of particles to fall
210 gently onto the glass substrate (Fig. 4a). This method requires no specialized equipment beyond the vials and substrate, and its
simplicity and gentle deposition make it attractive for detachment studies. Despite some limitations, such as uneven particle
distribution and low deposition throughput, we consider this method worth evaluating for our TWP seeding trials. Another
easy and widely used approach in MP particle size fractionation and recovery is through sieving, which we also adopted for
particle seeding because it is simple, reproducible, and well suited to laboratory controlled experiments (Prume et al., 2021).
215 Dried stacked stainless sieve with a mesh size of $200 \mu\text{m}$ (upper) and $150 \mu\text{m}$ (lower) were employed to isolate particles that
are less than $200 \mu\text{m}$ onto the substrate (Fig. 4b). During the sieving process, gentle manual tapping was applied to the frame
so that particles adhering to the mesh could easily dislodge, thereby reducing particle clusters.

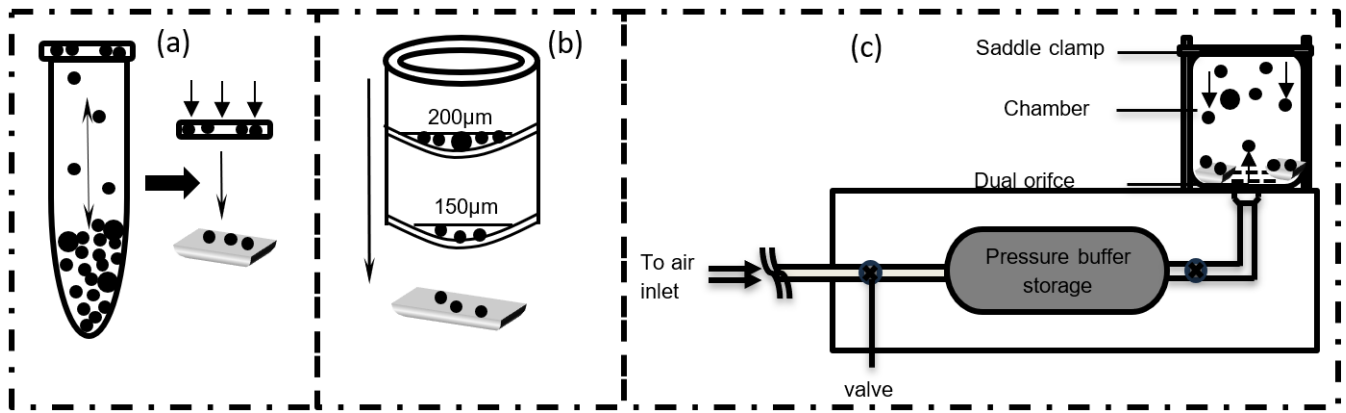


Figure 4. Diagram illustrating the three seeding methods. (a) cap tipping method (b) sieving method (c) developed low cost pressurized method

Due to the lumpiness of particles aggravated by their high rubber content, we developed a low-cost pressurized seeding apparatus to reproducibly deposit a monolayer of particles while minimizing the agglomeration on substrates (Fig. 4c). Particles are loaded onto a porous media filter housed in a custom, adjustable PVC socket and overlaid with a 600 μm sieve; together, these layers form a dual-orifice assembly that promotes uniform particle entrainment. Laboratory compressed air (6 bar) is regulated by a control valve and stored in a 2 L stainless steel pressure buffer (Festo CRVZS-2 HTI GmbH) fitted with a safety valve to cap the internal pressure at 2 bar. A solenoid valve (Bürkert type 0330) with a control switch then releases a short (~ 20 ms), high-velocity air pulse through the dual orifices into an airtight acrylic chamber secured by a saddle clamp. The substrates are placed inside the chamber so that particles ejected by the pulse of pressurized air gravitationally settle on them. This system also allows simultaneous seeding of multiple substrates in a single operation, improving the throughput, reproducibility, and efficiency. Finally, all three seeding methods were compared by placing the seeded substrates in the wind tunnel and capturing images at various orientations and replicate trials.

2.4 Deep learning model for particle segmentation

To analyze detachment of TWPs frame by frame, we used YoloV8 model, a deep learning based instance segmentation model released by Ultralytics in January 2023 (Jocher et al., 2023). In this study, Instance-segmentation was referred to as when each individual particle was detected as a separate object and the pixel-level boundary was delineated. This is important as TWPs vary in size and shape, and accurate particle outlines are required to detect the spatial deposition pattern and subsequently to quantify the detachment dynamics. The YoloV8n model was selected for its favourable trade-off between segmentation accuracy and computational efficiency in frame-to-frame analysis. Although larger models can achieve higher detection accuracy, they require greater computational resources. For this application, the model provided sufficient accuracy with efficient processing. Additional details on the model architecture and comparisons among other model families are provided in Appendix A.

2.5 Image segmentation

240 2.5.1 Data Preparation, Training and Optimization

To prepare the dataset for the instance segmentation model, we employed a semi automated annotation workflow to efficiently generate accurate bounding box labels for densely populated TWPs. At high particle densities, often exceeding 50 particles mm^{-2} , manual creation of polygons around individual particles becomes increasingly difficult, time-consuming and prone to error. We therefore adopted this approach to improve annotation efficiency and consistency. Each image was converted to grayscale and subjected to binary thresholding, with threshold values selected empirically based on image contrast to reliably separate particles from background noise. Contours were subsequently extracted from the binarized images and each vertex’s coordinates normalized before converting into the instance segmentation format (see Fig. A2, Appendix A). The training datasets were also enriched by employing a grid-based cropping strategy at equal vertical and horizontal strides, sub-images producing eight sub-images from in which each original image was further divided into 16 evenly sized sub-images with equal horizontal and vertical divisions. This increased sample diversity without altering particle appearance.

Table 1. Training and validation datasets used across the different training phases. PC denotes passenger car, TT denotes truck tyre, and TWP denotes tyre wear particle.

Phase	Label	Training Images	Validation Images
1	PC, TT	1158	802
2	TWP	562	204
3	TWP	1294	426

250

The data were prepared in three phases, each separated into training and validation sets (Table 1), to progressively refine the model’s ability to segment micro-sized particles. Firstly, we trained the network on two class labels, which exhibit a wide range of particle sizes and shapes. The model was trained and subsequently fine-tuned on new datasets using modified parameter settings to improve performance across particle scales. Finally, the fine-tuned model was further trained on datasets collected separately from the three seeding approaches. Additional details on the hyperparameter settings, model optimization, and computational resources are provided in Appendix A.

255

2.5.2 Performance Evaluation

To assess how well the model generalized to new images, we evaluated its ability to detect and segment the particles and their corresponding shapes. Performance metrics such as the precision, recall, and mean average precision (mAP) at different intersections over union (IoU) thresholds were selected. These metrics were computed for both the predicted bounding boxes and corresponding masks. The IoU measured how well a prediction matches the annotated ground truth. It is calculated as the overlap between the prediction and the annotation divided by the total area covered by both. The higher this value, the better the match. Meanwhile, mean average precision summarizes model performance across all particle instances by combining

260

precision and recall, using these IoU thresholds to determine whether a prediction is considered correct. Precision indicates how many predicted particles were correctly identified, whereas recall indicates how many annotated particles were successfully detected:

$$\text{Precision} = \frac{TP}{TP + FP} \quad (1)$$

$$\text{Recall} = \frac{TP}{TP + FN} \quad (2)$$

In the equation, FP, FN and TP are the total number of false positives, false negatives and true positives, respectively. To complement these metrics, we also employed the Dice similarity coefficient (DSC) to individually discriminate the particles that were segmented accurately. This metric has been widely adopted to measure instance segmentation quality in medical and microscopy scale imaging, by penalizing both false positives and false negative, providing a stricter measure of segmentation fidelity (Messer et al., 2024; Hajdowska et al., 2022).

$$\text{DSC} = \frac{2|A \cap B|}{|A| + |B|} \quad (3)$$

where A represents the area of pixels in the predicted segmented mask, and B denotes the area of pixels in the binarized ground-truth mask. The metric ranges from 0 for no overlap to 1 for perfect overlap. By computing this metric for each particle, we obtained a more detailed assessment of how accurately the model delineates particle boundaries across different particle sizes and shapes, thereby helping to evaluate how reliably these particles can be resolved on different surfaces.

2.5.3 Sensitivity analysis

To investigate the robustness of the model and to establish reliable metrics for subsequent detachment studies, we investigated how sensitive the network’s performance is to variations in the input image resolution. This selected model offers the lowest latency relative to the other variants (see Fig. A1, Appendix A), which makes it well-suited for frame-by-frame detachment tracking. However, the accuracy could be compromised at its default image resolution (640 px). Therefore we fine-tuned the model at different input image resolutions specifically at 416, 640, 960 and 1280 px, holding other hyperparameters constant and comparing the resulting performance based on the evaluation metrics. This experiment quantifies the trade-off between segmentation accuracy and computational efficiency, guiding the choice of the image size that preserves accuracy yet remains fast enough for the detachment analysis. Using the selected image size, an independent validation datasets were evaluated from the three seeding methods and the particle attributes (projected equivalent diameter, circularity and corresponding Dice similarity coefficient) for every segmented particle were computed. This experiment enables a comparative evaluation of the seeding methods with respect to agglomerate reduction and size-dependent segmentation performance, thus providing the empirical basis for defining a segmentation quality threshold and a minimum particle size in resolving detachment.

2.5.4 Particle feature extraction

To evaluate the influence of particle morphology on detachment behaviour, two shape descriptors were quantified from the segmented particle images in two dimensions (2D): projected equivalent diameter (D_e) and circularity (C). These descriptors characterize the projected size and shape of the particles and are relevant because particle morphology influences adhesion and subsequent detachment from substrates (Ayinde et al., 2025). The equivalent diameter provides a size descriptor based on the projected particle area and is particularly useful for characterizing irregularly shaped particles, and calculated as:

$$D_e = \sqrt{\frac{4A}{\pi}} \quad (4)$$

where A is the projected area (plan-view) of the particles expressed in pixels. On the other hand, the circularity which was first introduced by Cox (1927) as a shape factor, describes how closely the 2D particle outline approaches that of a perfect sphere and was computed as:

$$C = \frac{4\pi A}{P^2} \quad (5)$$

Where P is the projected perimeter of the particle. The circularity value of 1 indicates a perfect sphere, whereas value less than 1 denote increasing deviation from circularity. In this study, TWPs exhibited wide range of irregular projected shapes (see Fig. B1, Appendix B). This made the descriptor metric instrumental in determining how elongated or irregular the particles are, and how they exhibit different detachment behaviour due to variations in contact area and adhesion forces.

2.6 Parameter selection and optimisation

The trade-off between the performance and image input resolution for the deep learning model is evident, with detection accuracy improving consistently at higher resolutions (Fig. 5). The evaluated metrics precision, recall, and mean average precision at 50% overlap threshold (mAP@50), and across multiple overlap thresholds (mAP@50-95) improve steadily with higher resolution during fine-tuning. The lowest resolution at 416 px produces the weakest performance, the highest number of missed detections and the lowest confidence value. As the image size increases to 640 px and 960 px, these metrics improved, and at 1280 px, it achieved the maximum performance in precision and recall, indicating that the model detects more objects with greater confidence value as the image size increases for both outputs. In particular, the stricter metric (mAP@50-95) shows a notable improvement at the highest resolution, especially for mask prediction, reflecting more accurate object localization. This suggests that finer object details and boundaries are better captured at higher input resolutions. However, such behaviour is expected as altering the image size greatly affects the accuracy of any model, hence adapting a higher resolution image or images similar in resolution to those used during inference helps preserve more details and yield higher segmentation accuracy (Luke et al., 2019).

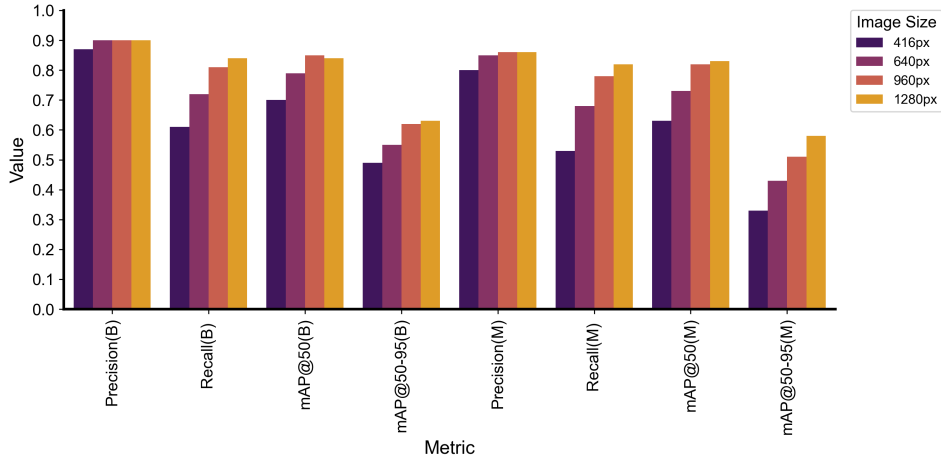


Figure 5. Comparison of model performance across input image resolutions. The figure evaluates the performance for TWP detection and segmentation at four input image sizes (416 px, 640 px, 960 px, and 1280 px). Metrics labelled B refer to bounding-box predictions and M as mask predictions. Results illustrates how image resolution impacts detection and segmentation accuracy.

Although a higher-resolution image size increased computational cost and training time, the gain in segmentation performance was substantial. While larger models can achieve slightly higher precision than the smallest model (Zhao et al., 2024), the improvement is modest relative to the more than two-fold increase in computational load. Hence, 1280 px input resolution was adopted for subsequent analysis based on the comparative assessment of the observed gains in detection accuracy and segmentation performance relative to the associated increase in computational cost during training, while still maintaining a fast inference rate suitable for frame-to-frame detachment analysis.

2.7 Comparative analysis of seeding methods

The three seeding methods employed to deposit TWPs onto the substrates yielded different particle distribution characteristics that influenced segmentation performance (Fig. 6). The tipping method produced the most heterogeneous distribution with pronounced agglomeration, resulting in a lower quality mask with most data points clustered at Dice coefficient ≤ 0.2 across most circularity and larger particles ($\geq 200 \mu\text{m}$). Sieving demonstrated improved performance with reduced agglomeration, shifting the distribution of the metric upward, particularly for particles with $C < 0.6$. The pressurized methods yielded the optimal dispersion, producing the clearest masks with large particles ($\geq 200 \mu\text{m}$) consistently exceeding Dice coefficient of 0.8, and even the smallest size category exhibited moderate segmentation accuracy. This seeding method disperses particles more uniformly across the substrate, reducing agglomerates as seen from the dense contour in Fig. 6c with smaller density exceeding the largest particle size category. Across all the methods, particle size and shape modulate segmentation accuracy. The larger the particle size, the more distinctive the edges and pixels are, so the Dice coefficient rises steadily with equivalent diameter. Conversely, smaller particles and those closer to a perfect sphere tend to give little textural details for the network to learn from, explaining why in Fig. 6c some small points remain near the least Dice coefficient.

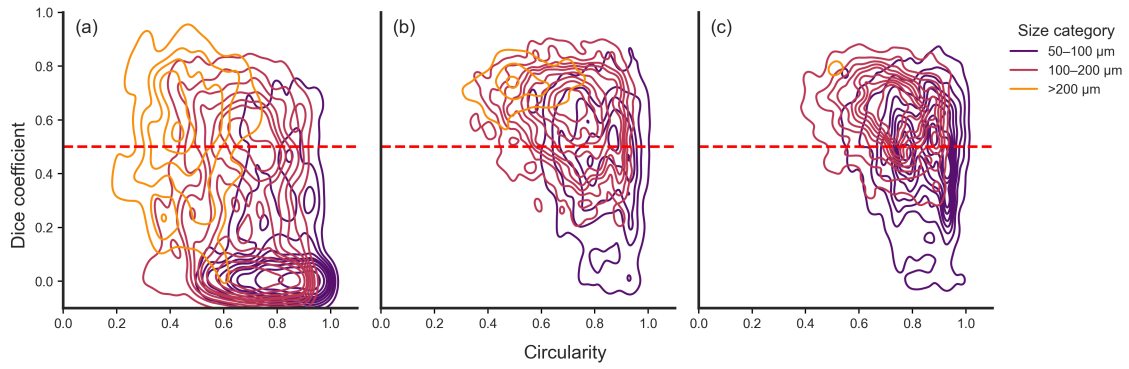


Figure 6. Comparison of particle segmentation accuracy across seeding methods. Plot showing relationship between shape, size and Dice similarity coefficient where (a) is the tipping, (b) sieving and (c) pressurized method.

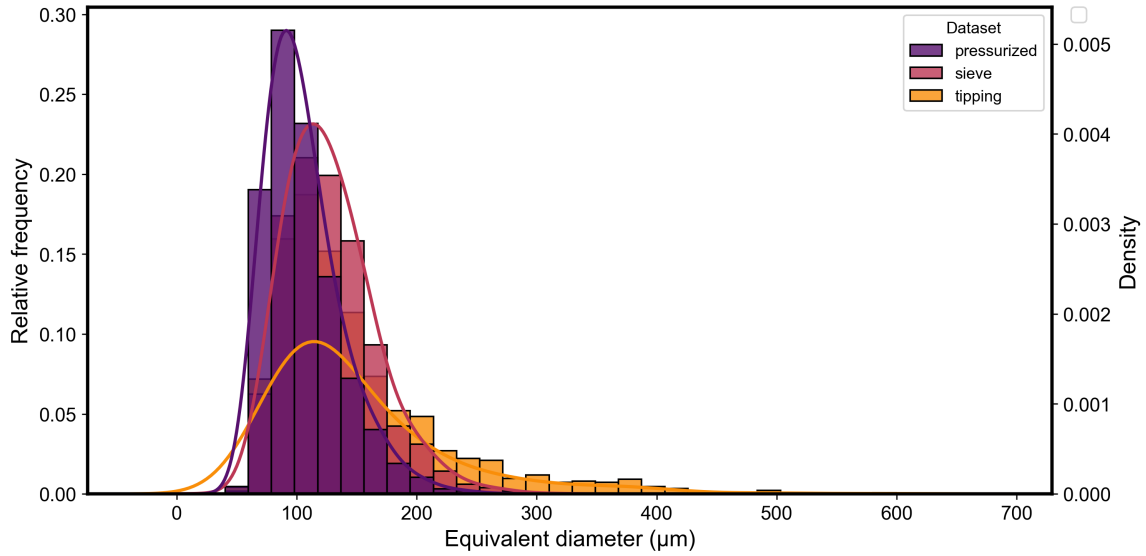


Figure 7. Particle size distributions for the three seeding methods. The histogram bars show the relative frequency of the equivalent diameter (D_e) on the left y-axis, and the smooth curves show the corresponding kernel density estimates on the right y-axis for the pressurized, sieving and tipping methods. The distributions illustrate differences in particle uniformity and agglomeration among the seeding methods.

340 The particle size distributions across the three seeding methods also reveal distinct uniformity and agglomeration behaviours, with all methods exhibiting unimodal rightly skewed patterns(Fig. 7). The pressurized method produces particles concentrated within the 80 - 180 μm range, with higher relative frequency and density at the peak, indicating a greater population which is evenly spread with optimized particle sizes. This distribution exhibits reduced right skewness, suggesting fewer oversized clusters. In contrast, the tipping method yielded a broader particle size distribution, characterized by higher right skewness and

345 more frequent large clusters, reflecting increased agglomeration and spatial heterogeneity. Benchmarking against commercial

equipment (Microtrac, Fig. B1, Appendix B), which provided the laboratory reference size distribution predominantly in the 125 – 200 μm range, confirms that the pressurized method distribution aligns with the expectation from the laboratory analysis, establishing an optimal baseline for future detachment studies.

2.8 Air flow characteristics

2.8.1 Velocity and turbulence measurement

To estimate the mean velocity and the corresponding friction velocity (u_*), instantaneous velocities were measured at 15 different heights above the tunnel floor using the constant temperature anemometer at a frequency of 10 kHz, and the resulting data were analyzed using a logarithmic wind profile approach under the assumption of a neutral boundary layer. The device provides measurement of the three-dimensional wind components: streamwise (u), cross-wise (v), and vertical (w) components were collected over 10 s intervals at each measurement point in the vertical profile under steady-state conditions, thus enabling the computation of turbulence statistics for detailed flow analysis. To assess reproducibility, four independent replicate measurements were performed for each wind speed stage. Prior to each wind tunnel run, the device settings were corrected for temperature variations to account for the small effect of temporal thermal variation, which could affect measurement precision. The mean wind speed profiles obtained were fitted to the logarithmic law of the wall, where the friction velocity was extrapolated using Eq. (6), and roughness length (z_0) computed accordingly. This approach verified the presence of a well-developed boundary layer. In addition to the Prandtl method, the eddy covariance (EC) was utilized independently to estimate friction velocity, $u_{*,\text{EC}}$ at different heights. This was computed with other flow statistics using an automated software tool ‘bmmflux’ developed in the Micrometeorology group of the University of Bayreuth. The software performs standard turbulence post-processing, including flow statistics and flux related variables. Further implementation details and processing workflow are provided in Appendix C, with broader framework described by Thomas et al. (2009).

$$u_{*,\text{Pr}} = \kappa \cdot \frac{\partial \bar{U}}{\partial \ln(z)} \quad (6)$$

Where κ is the von Karman constant (0.4), z is the measurement height above the tunnel floor, and d is the zero-plane displacement height. In this study, d was approximately as $2h/3$, where h is the roughness element height (10 mm), consistent with the commonly used approximation for roughness canopies and similar elements (Garratt, 1994; Foken and Mauder, 2008). The velocity values, $u_{*,\text{EC}}$ were compared with those obtained via the Prandtl, $u_{*,\text{Pr}}$ to ensure consistency. To establish a direct relationship between the friction velocity values computed by the two methods and surface velocity at the substrate position within the tunnel, an empirical equation was derived using linear regression. This ensured that the estimated friction velocity values used in subsequent detachment experiments was unbiased and accurately reflected the aerodynamic conditions experienced in the system.

375 2.8.2 Friction velocity calibration

For modelling MP detachment, it is necessary to calibrate the friction velocity because it is the driving variable used at the surface to characterize detachment, which is always computed from extrapolating the vertical wind velocity at different heights using the log-law. Hence, the friction velocity was calibrated by comparing two computational methods: one assumes the log-law of the wall across measurements at different distances from the wall, and the other one relies solely on the eddy-covariance momentum flux measured at a single height of $z = 0.0114$ m, a point where the two approaches converge and yielded the same friction velocity value, with a mean bias of 0.008 m s^{-1} , and root mean square error of 0.014 m s^{-1} . Across the ten discrete stepwise stages used in this study, the free stream velocity (u_∞) ranges from $1.0 - 9.4 \text{ m s}^{-1}$ for an average of four replicates conducted to achieve reproducibility. The friction velocity and roughness length (z_0) were computed at five different heights at $z \leq 23.5$ mm, where the velocity profile agrees well with the logarithmic law of the wall. The profile analysis returned values in the range of $0.052 - 0.527 \text{ m s}^{-1}$ (see Fig. 8), while the eddy covariance yielded $0.063 - 0.525 \text{ m s}^{-1}$ with around 4 % of average relative difference between the two methods. The comparison between these two methods confirms that the test section achieves a fully developed turbulent flow (Fig. 9). The empirical linear relation between the free stream velocity and friction velocity yielded $u_* = 0.057 U_\infty$, which was employed to compute the detachment friction velocities for particles at all stages in the experiment. While the log-law fitting was restricted to the near-wall region, the velocity and shear-stress profile (See Fig. C1 and C2), suggest that the roughness-influenced layer extends to approximately 7 to 8 cm, depending on the height of the roughness element, the upstream flow structure, and fetch length. The z_0 intercepts at an average of 0.30 ± 0.1 mm, corresponding to approximately 1/30 of the height of the roughness element, matching the 1/10 – 1/30 requirement reported for comparable geometric canopies (Fang and Sill, 1992). The longitudinal free stream turbulence intensity over the ~~entyre~~ entire velocity range in the tunnel is approximately ≤ 1 %. Based on the spectral peak for the highest velocity stage (see information in the Appendix and Fig. C3), the characteristic frequency was ~~17.8~~ 39.8 Hz, corresponding to a time scale of ~~0.056~~ 0.025 s. Using the mean streamwise surface velocity for that same stage, the corresponding longitudinal length scale was approximately ~~3.6~~ 1.6 cm. This estimated integral length scale was smaller than the internal boundary layer thickness, indicating that the dominant energetic motions relevant to detachment were contained within this layer.

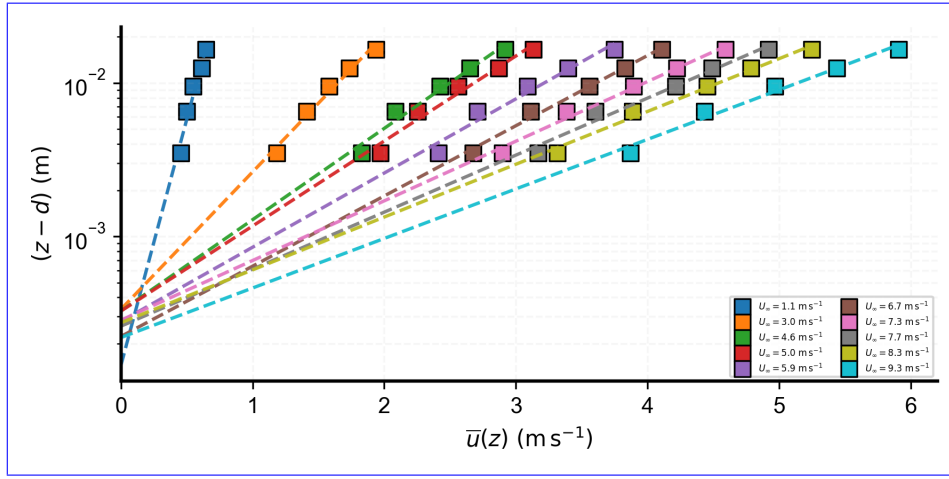


Figure 8. Logarithmic wind profile plots showing the relationship between the mean wind speed $\bar{u}(z)$ and logarithmic height $\ln(z-d)$ across the ten flow stages. Each colour represents one stage, and the dashed lines indicate the logarithmic fits used to derive the profile based friction velocity (u_*) with ($\kappa = 0.4$). Extrapolating the data to $U = 0$ yields the roughness lengths ($z_0 \approx 0.3$ mm).

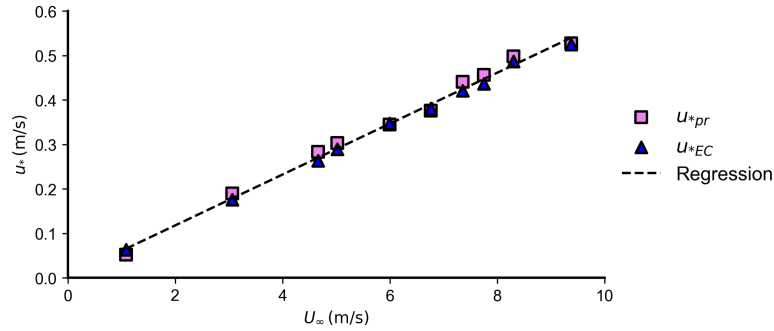


Figure 9. Calibration of u_* from the profile measurement and eddy-covariance as a function of free-stream velocity at $z = 0.0114$ m. The regression gives $R^2 = 0.994$, with a 95% confidence interval of 0.055–0.059 for the fitted coefficient.

2.9 Resolving particle detachment

2.9.1 Microplastics deposition and recording

Pristine TWPs were used as a proxy of irregularly shaped MPs to conduct the idealized detachment experiments (Sect. 2.2). The particles vary in size and shape (see Fig. B1, Appendix B), which are characterized using an optical particle analyzer (Laser diffraction analyser, Microtrac Retsch GmbH) with sizes ranging predominantly from $125 \mu\text{m}$ to $200 \mu\text{m}$. All particles were in pristine condition, with a material density of approximately 1300 kg m^{-3} . The detachment experiments were conducted on standard laboratory glass slides (Thermo Fisher Scientific), measuring $75 \text{ mm} \times 25 \text{ mm}$, mounted flush on the support, with the long side facing perpendicular to the streamwise flow direction and the short side aligned parallel to it. Prior to testing,

the glass slides were thoroughly cleaned following the protocol established by Ibrahim et al. (2003), ensuring the removal of surface impurities that could contribute to stabilizing forces and interference with particle detachment.

Image acquisition for both training and detachment analysis was performed under ~~identical~~prescribed flow conditions. The images and detachment events were controlled and monitored via computer tethering using the Sony Imaging Edge desktop version 1.2.01.04031, from which images were captured in XAVC S HD format (1920 × 1080 pixels) at 10 s intervals. A clear image zoom was applied during acquisition, resulting in an effective field of view of approximately 18 × 12 mm. All images were stored frame-by-frame in a designated folder for subsequent analysis.

To ensure statistical reproducibility, given the heterogeneity in particle size and shape, eight independent replicates were conducted under identical flow conditions. Particle seeding was achieved using our low-cost pressurized technique that enables an even distribution of the particles across the glass surface. The average initial particle count was around 500 ± 250 particles / slide. Care was taken to prevent particle clustering. The particle-laden substrates were mounted on a custom-built holder aligned with the same level as the roughness elements. Seeding was performed immediately prior to each experiment to minimize exposure to environmental conditions that could influence particle adhesion. The particle-laden substrate was exposed to airflow applied in successive stages, each lasting 300 s, with the wind speed set by the discrete tuning of the transformer-fan system, with the u_* incrementally increasing from 0.06 to 0.53 m s⁻¹ over the course of the experiment. All experiments were conducted at ambient air temperatures of $18 \pm 4^\circ$ C and relative humidity ranging from 21 % to 41 %.

2.9.2 Image-based particle detection and detachment quantification

The custom-trained YoloV8n model (as discussed in detail at Appendix A) in tandem with a customized Python script designed to automate object detection, mask extraction and detachment tracking was used to monitor and quantify particle detachment. It was applied frame by frame to identify and segment particles individually. Parameters such as projected area, perimeter bounding box dimensions, circularity and equivalent diameter were computed. A conversion factor of 9 μm / pixel was applied to translate the pixel-based quantity into a physical metric in μm. Binary ground-truth masks were created for all images to compute the Dice similarity coefficient for the segmented particles individually. To ensure higher accuracy, only particles meeting the following criteria were retained: confidence level ≥ 0.1 , Dice coefficient ≥ 0.5 (computed against the binary mask), $D_e \geq 30$ μm, and not touching the image boundaries.

To resolve the temporary changes and identify detached particles, a frame-based tracking script was implemented, which assigned consistent particle IDs to particles detected in the first frame and matched them across subsequent frames using Euclidean distance between the bounding box centres. A distance threshold was used to determine whether the particle detached and moved or was still attached to the surface. Once the particle was no longer matched in subsequent frames, we considered it to be detached. All extracted data, including the particle ID, size and shape metrics, were saved in comma-separated format. The detachment fraction was computed as a fraction of particles no longer detected compared to the initial count. For each experiment, the detached fraction was defined as:

$$n_{det} = 1 - \frac{N(u_*, t)}{N_0} \quad (7)$$

440 where n_{det} is the ~~fraction that detached~~ detached fraction with respect to friction velocity, u_* , $N(u_*, t)$ is the number of particles attached to the substrate at a certain incremental airflow exposure period, t , and N_0 is the initial particle number on the substrate. The detached fraction was normalized as $\bar{n}_{det}$ across the replicates and then binned into a fixed interval of 0.2. Within each bin, the ~~mean~~ bin-averaged friction velocity $\bar{u}_*$ and ~~mean-normalized detached fraction~~ $\bar{n}_{det}$ were computed across the replicate data. Subsequently, a two-parameter logistic function and a linear regression model were fitted to the binned data.

$$445 \quad N_*(u_*) = \frac{1}{1 + e^{-\beta(u_* - m)}} \quad (8)$$

$$\tilde{n}_{det}(u_*) = a + bu_* \quad (9)$$

Where $N_*(u_*)$ and $\tilde{n}_{det}(u_*)$ denote the logistic-model and linear-regression predictions, respectively, of the binned detached fraction. In the logistic model, β controls the steepness of the curve and thus the rate at which detachment increases with
 450 friction velocity, while m denotes the inflexion point, corresponding to the friction velocity at which 50% of the normalized detachment response is reached. In the linear model, a and b denote the intercept and slope, respectively. Although the logistic function has been widely used to model resuspension responses (Esders et al., 2023; Lim et al., 2025), linear regression was additionally fitted here as an empirical approximation to assess whether a simplified linear representation was sufficient to capture the observed detachment trend over the binned friction-velocity range. Therefore, the intercept was not interpreted
 455 physical as detachment at $u_* = 0$. The goodness-of-fit for both models was evaluated using the coefficient of determination, R^2 .

To evaluate the influence of particle morphology on detachment behaviour, all detached particles were further stratified by equivalent diameter (80–150 μm , 150–300 μm) and circularity (0.3–0.6, 0.6–0.8, 0.8–1.0). For each size and shape class, the normalized detachment data were recomputed, binned and fitted with both models as described above, and the corresponding
 460 u_*^{th} values (and their variability across replicates) were compared.

2.9.3 Predicting Threshold Friction Velocity

The theoretical framework developed by Shao and Lu (2000) is adopted to estimate the threshold friction velocity based on a force balance acting on a stationary particle on a surface exposed to wind-induced shear stress. The model predicts the fluid threshold required to initiate particle motion. This threshold condition is governed by particle properties, gravitational forces,
 465 and interparticle cohesion forces, and is expressed as:

$$u_{*th} = A_N \sqrt{\left(\sigma_p g d + \frac{\gamma}{\rho d} \right)} \quad (10)$$

where A_N is a dimensionless scaling parameter that controls how effective the applied shear surface shear stress is converted into aerodynamic forces acting on the particle, σ_p is the ratio of particle to air density, g is the gravitational acceleration, d

is the projected equivalent particle diameter, γ is the interparticle cohesive force which ranges from 1.65×10^{-4} to 5×10^{-4} kg s⁻² for dry particles. Although the Shao and Lu (2000) model has been extensively validated for dry, loose sand grain data over a particle size range of approximately 50 – 1800 μ m, its applicability to irregularly shaped particles such as TWPs with complex morphology remains unverified. TWPs experience more complex aerodynamic forces, but we hypothesize that their detachment can still be conceptually described within the force balance framework (Fig. 10). In this study, the microsphere data from Esders et al. (2022), obtained under comparable flow conditions, are treated as a reference case for which the Shao model and its parameter range have already been validated. We therefore do not recalibrate their dataset, but instead use it as a benchmark to evaluate how well the Shao framework agrees with the TWP detachment thresholds. To explore the sensitivity of the model, three calibration strategies are considered:

- (i) Reference: A_N fixed at 0.111 and γ constrained to the original Shao and Lu range for dry particles
- (ii) A_N fixed and γ allowed to vary within a wider plausible range to accommodate different effective cohesion of the particle
- (iii) both A_N and γ treated as free fit parameters, allowing the model to adapt more flexibly to the estimated particle threshold.

We use these three options not to claim a unique parameter set for TWPs, but to illustrate how far the Shao and Lu framework can be modified and stretched to describe the particle detachment threshold in relation to the established microsphere reference.

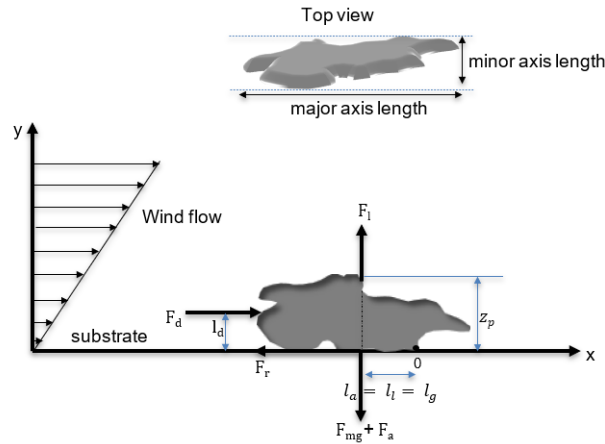



Figure 10. Simplified two-dimensional conceptual schematic of the principal forces acting on ~~nonspherical~~non-spherical particles on a surface, includes the aerodynamic; drag force (F_d), lift (F_l), stabilizing; adhesion force (F_a), gravitational force (F_{mg}), and frictional force (F_r), adapted from Olivares et al. (2024). This figure illustrates the force-balance framework considered in this study. When the moment of the aerodynamic forces exceeds the stabilizing forces, the particle detaches and gets entrained into the flow.

3 Results and Discussion

This section presents three key findings from the idealized detachment experiments, which are quantification of TWP detachment as a function of particle morphology, comparison with the monodisperse microsphere as a benchmark, and finally evaluation of the performance of the theoretical model against experimental threshold friction velocities.

3.1 Detachment experimental results

The experimental setup captured TWP detachment events across a 18 mm by 12 mm field of view on the glass surfaces, showing particles of different sizes and shapes (Fig. 11a). The deep learning framework detected over 90% of TWPs across image frames (Fig. 11b), demonstrating robust individual particle tracking with unique particle identifiers. A Dice coefficient threshold of 0.5 validated segmentation masks, ensuring that the same particle was correctly tracked until it either detached from the glass surface or exited the camera frame. Particle detachment may occur through rolling, sliding, or lift-off (Ibrahim et al., 2003; Kassab et al., 2013). However, our optical tracking approach focused explicitly on identifying detachment events rather than distinguishing among these motion modes. Some particles underwent small positional migrations before complete frame exit, requiring careful tracking to distinguish between temporary movement and actual detachment. In light of this, we employed a distance-based particle matching technique using a threshold of 200 pixels, equivalent to 1.8 mm, to associate particles across frames. This defined distance ensured that particles maintaining their identification while migrating within the field of view were not prematurely classified as detached. A particle was only considered to be detached when it had moved beyond this matching threshold and could no longer be tracked across consecutive frames.

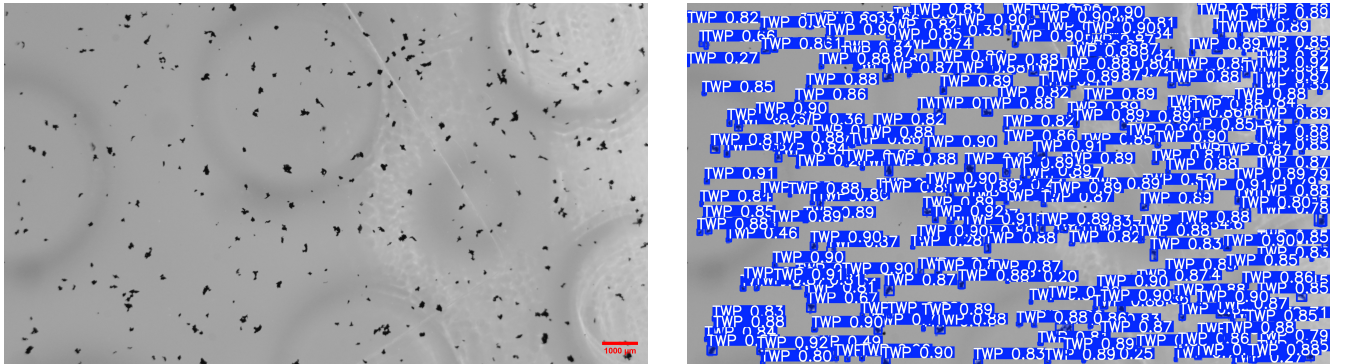

(a) Imagery of the TWPs deposited on the glass substrate, dispersed using the pressurized seeding method.

(b) Corresponding model inference results showing detected particles with bounding boxes and segmentation masks in blue; the numbers indicate the particle label and detection confidence score for each identified particle (confidence threshold = 0.1).

Figure 11. Image pair illustrating the acquisition and the deep learning based segmentation of TWPs on the glass test substrate.

The time evolution of the detachment fraction for all eight replicate experiments is shown as a function of time (Fig. D2, Appendix D). Notably, the detachment behaviour varied among the replicates. The remaining fraction on the substrate after

the 30-min exposure time ranged from 57 % to 86 %. Such incomplete removal had been reported in detachment studies and depends on different factors, including exposure time and velocity increment during stage change (Theron et al., 2020; Esders et al., 2022). In general, the TWPs were not detached at a single value of u_* , but over a range of incremented u_* values, with the cumulative detached fraction differing across replicates. In some cases, a sharp initial jump in particle release was observed immediately after the fan started, which is attributed to tunnel vibrations dislodging the weakest-bound particles first. In addition, the transient spin-up of the flow during stage changes may have contributed, as the friction velocity increases sharply at some stage change before reaching a quasi-steady phase. This interpretation is consistent with previous studies showing that weakly adhered particles are removed earlier, whereas more strongly adhered particles require larger or more intermittent aerodynamic forcing for detachment (Braaten et al., 1990; Ibrahim et al., 2003). Furthermore, the observed detachment behaviour may have been influenced by local micro surface roughness and humidity conditions. Although humidity can influence particle detachment (Kim et al., 2016), the experiments were conducted at a moderate relative humidity below 45%, and this effect was not examined explicitly in the present study. Since the glass substrate used here was relatively smooth, sheltering effects were likely reduced compared with rougher surfaces (Kassab et al., 2013), and adhesion was therefore expected to depend primarily on close-contact forces such as van der Waals and electrostatic interactions (Zhang et al., 2025).

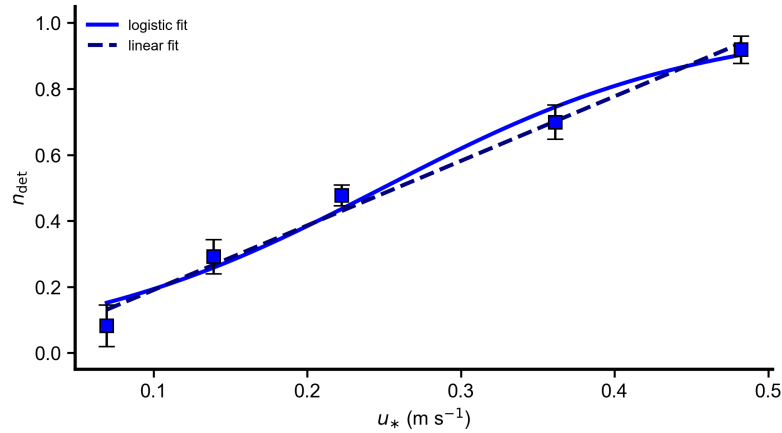


Figure 12. Detached fraction of TWPs, normalized to the maximum in each replicate, as a function of friction velocity (u_*) for the eight replicates. The data points show ensembled averaged values (mean $\pm$ SD across samples). The solid line is the logistic fit ($R^2 = 0.97$); the dashed line is linear regression fit ($R^2 = 0.98$).

Detachment rate spans a velocity range because adhesion is heterogeneous. Since detachment occurs across broad range of friction velocity, it is appropriate to define a representative threshold friction velocity (u_*^{th}) at which a significant fraction (50 %) of particles have detached (Ibrahim et al., 2003). The detachment curve shows a monotonic increase of the n_{det} with friction velocity, as described by the two models (Fig. 12). Applying both models to the ensemble binned data yielded very similar characteristic thresholds. The global logistic and linear regression fit yielded fluid threshold of 0.25 m s^{-1} and 0.26 m s^{-1} respectively, and the mean threshold of the eight replicates was $0.26 \pm 0.06 \text{ m s}^{-1}$. The spread across the binned points could be

argued to indicate that TWPs experience broadly similar effective adhesion on the uniformly smooth glass substrate, suggesting that variability may be driven by differences in local contact geometry and microscale adhesion.

3.2 Investigating the effect of particle size and shape on detachment rate

Particle morphology is another factor that influences detachment. Across all experiments, TWPs spanned a broad range of sizes and shapes (Fig.D3, appendix D), and the comparison of the initial and final population indicates that detachment does not occur uniformly across the distribution, but preferentially from a particular sub-range. Equivalent diameter ranges from $80\ \mu\text{m}$ – $300\ \mu\text{m}$, with most particles between $100\ \mu\text{m}$ – $250\ \mu\text{m}$, and a peak between $120\ \mu\text{m}$ – $160\ \mu\text{m}$. Circularity varies from 0.3 (highly irregular) to 1.0 (nearly ~~spherical~~circular), with most particles clustering mainly between 0.6 – 0.8, and only a few fractions being nearly ~~spherical~~circular.

The threshold friction velocity estimated from the detachment curves varied systematically with particle size (Fig. 13 A - C). For the smaller-sized bin ($80 - 150\ \mu\text{m}$), the mean threshold across samples was $0.33 \pm 0.05\ \text{m s}^{-1}$, whereas the larger-sized bin ($150 - 300\ \mu\text{m}$) had a mean threshold value of $0.41 \pm 0.03\ \text{m s}^{-1}$. Thus, particles in the upper size bin detached at friction velocity roughly 25 % higher than those from the lower size bin, even though both belong to the same bulk population. This size dependence is consistent with findings from Del Bello et al. (2021), who reported lower thresholds for smaller ($81 - 89\ \mu\text{m}$) than for larger ($110 - 210\ \mu\text{m}$) irregular volcanic ash particles for both laboratory experiments and field studies. This also agrees with the force balance semi-empirical model of Shao and Lu (2000), from which it can be inferred that threshold friction velocity reaches a minimum around $75 - 100\ \mu\text{m}$, and tends to increase with particle size for larger particles as gravity effect becomes increasingly important relative to cohesive forces. The TWP sizes investigated in this study lie largely within this gravity-dominated regime, so a monotonic increase in threshold with equivalent diameter is expected and is reflected in the estimated fluid threshold values.

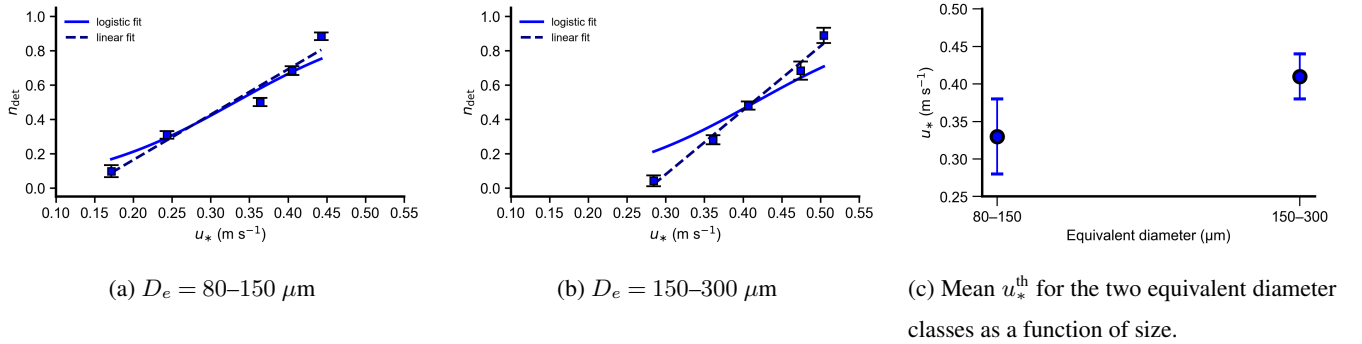


Figure 13. Size-resolved detachment behaviour of TWPs on the glass substrate. Panels (a) and (b) show the normalized detachment fraction (n_{det}) as a function of friction velocity for the two equivalent diameter class ($D_e = 80\text{--}150\ \mu\text{m}$ and $150\text{--}300\ \mu\text{m}$). Squares denote ensemble means and error bars denote ± 1 SD of the binned data; solid and dashed lines indicate the logistic and linear regression fits, respectively. Panel (c) compares the mean threshold friction velocity for the two size classes; error bars denote ± 1 SD across samples.

Particle shape quantified by circularity also had a pronounced effect on detachment rate (Fig. 14 A – D). More ~~rounded~~ circular TWPs ($C = 0.8\text{--}1.0$) detached at lower threshold values ($0.33 \pm 0.02 \text{ m s}^{-1}$), the intermediate class ($C = 0.6\text{--}0.8$) at $0.37 \pm 0.03 \text{ m s}^{-1}$, and the highly irregular TWPs ($C = 0.3\text{--}0.6$) at higher threshold values ($0.40 \pm 0.02 \text{ m s}^{-1}$). This

545 monotonic increase in these threshold friction velocity with decreasing circularity suggests that irregular TWPs are more resistant to aerodynamic removal than rounded ones. A possible explanation is that irregularly shaped particles may form stronger adhesive contacts with the surface because of their larger effective contact area and multiple contact points. A highly irregular TWP may lie flatter on the substrate, and its deformable nature may further increase its contact area. By contrast, more ~~spherical~~ circular particles may have a smaller contact footprint and therefore a lower degree of adhesive interaction. Although

550 irregular particles may experience similar or even slightly enhanced aerodynamic forces due to protruding parts extending into higher-velocity regions of the boundary layer, this effect may be secondary to their stronger adhesion. In terms of the conceptual two-dimensional force-balance schematic shown in Fig. 10, irregular particles may possess a larger adhesion lever arm (l_a) because of their extended footprint, while simultaneously exhibiting a smaller drag lever arm (l_d) and a reduced area exposed to the airflow. Consequently, depending on the particle orientation and contact geometry, the aerodynamic moment

555 ($F_d \cdot l_d$), with potential contribution from lift, may be insufficient to overcome the adhesion moment ($F_a \cdot l_a$), which would require a higher threshold friction velocity for detachment.

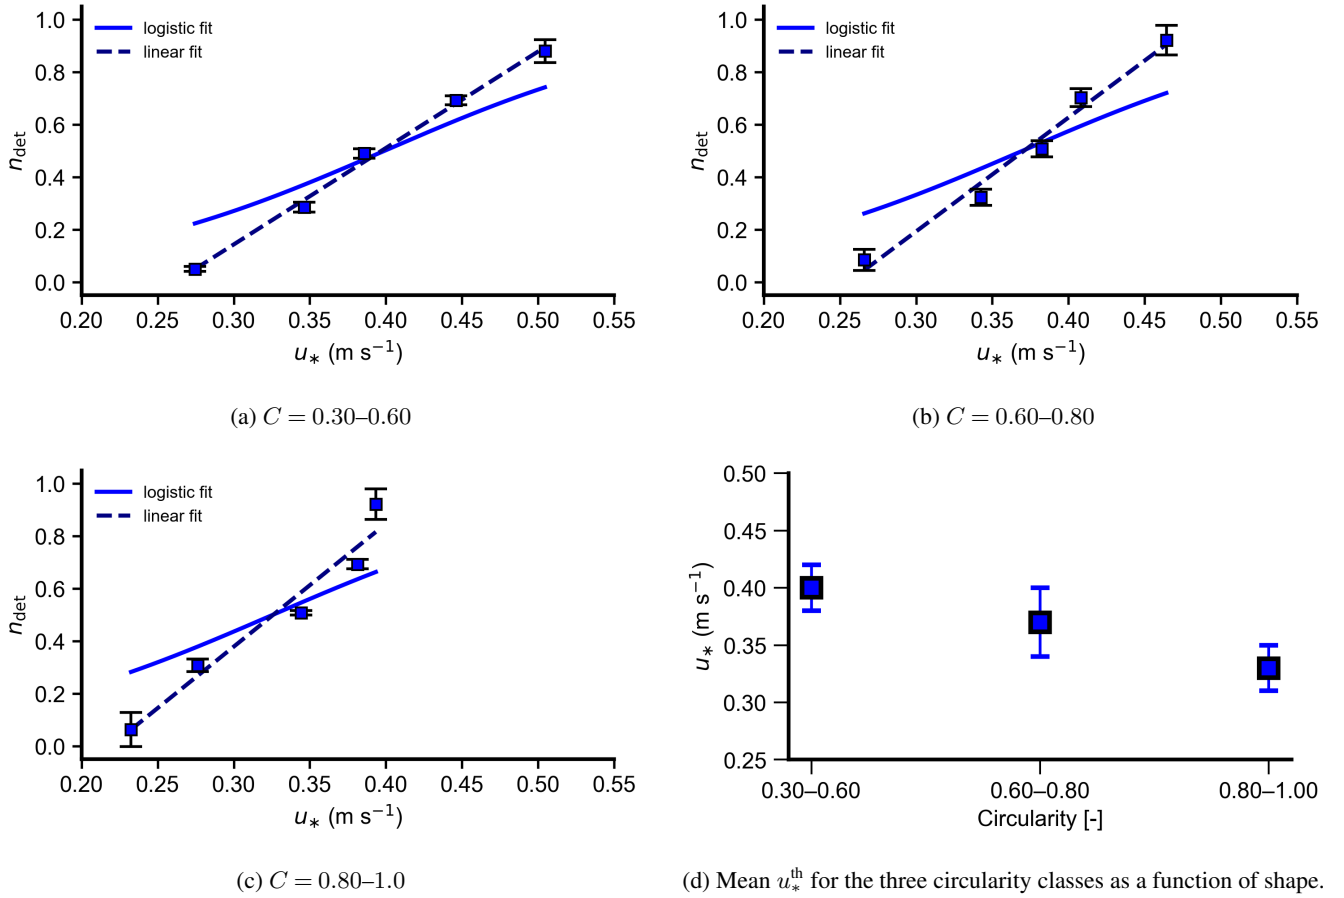


Figure 14. Shape-resolved detachment behaviour of TWPs on glass substrate. Panels (a)-(c) show the normalized detached fraction as a function of friction velocity for the three circularity classes ($C = 0.30-0.60$, $0.60-0.80$, $0.80-1.00$). Squares denote ensemble means ± 1 SD of the binned data; solid and dashed lines indicate the logistic and linear regression fits, respectively. Panel (d) shows the mean threshold friction velocity of the three shape classes; error bars denote ± 1 SD across samples.

These findings also align with other studies discussing particle shape effects. Olivares et al. (2024) reported that irregularly shaped particles showed significantly lower detachment rates compared to glass microspheres of the same cohort under similar conditions. Furthermore, Fig. 15 extends our comparison to [PE-polyethylene](#) microspheres of the same size cohort ($115 \mu\text{m}$). In other words, under identical conditions, a [PE-polyethylene](#) microsphere might lift at half the shear force required to lift a comparable-sized TWP. This comparison can highlight how variability in particle morphology and particle roughness could alter the balance of forces. Thus, the elevated threshold observed for TWPs could arise due to the effect of a broad range of morphological differences.

The magnitude of aerodynamic drag [and lift](#) can also be influenced by the flow pattern around the particles. In our study, we also estimated the particle Reynolds number (Re_p) as $2 \leq Re_p \leq 80$ and the Stokes number (St) as $7 \leq St \leq 100$, indicating that Stokes drag alone is not strictly applicable across the full parameter range and that Reynolds-number-dependent drag

corrections become relevant (Shao, 2008; Loth, 2008). The fluid motion around the vicinity of these particles is influenced mainly by inertia, especially towards the analyzed larger particle size class. This implies that particle responses to rapid near-wall flow fluctuations are not expected to be instantaneous; rather, stronger and more sustained near-wall forcing may be required to overcome adhesion and gravity. This was also consistent with the higher fluid threshold observed for the larger particle class in our findings. It is also noteworthy that detachment motion can occur via rolling, sliding, or lift-off, and many studies and models developed for spherical particles emphasize rolling as an efficient incipient-motion pathway (Wang, 1990; Sharma et al., 1992; Ibrahim et al., 2003; You and Wan, 2014). However, for irregular particles, geometric variation and contact configuration may shift the preferred mode towards sliding, as reported by Olivares et al. (2024) in their recent studies on the simulations of irregular micro-particles (Olivares et al., 2024). For particles with non-negligible inertia, direct lift-off under saltation conditions cannot be ruled out. In principle, micro-impacts with surface asperities and particle to particle collisions can impart a vertical impulse, and lift-off may occur when the associated kinetic energy exceeds the adhesive potential well (Hu et al., 2023; Kassab et al., 2013). Owing to the substantial variability in TWP morphology, the dominant detachment motion is expected to be complex. In this study, our tracking approach resolved detachment events but was not designed to unambiguously classify the specific motion mode.

3.3 Prediction of threshold friction velocity and comparison with microsphere

Across the investigated size range, the Shao and Lu fits reproduce the observed trend that TWPs require a higher friction velocity threshold to initiate detachment compared to the ~~PE~~-polyethylene microsphere (Fig. 15). For the ~~PE~~-microsphere reference data, the model with the standard empirical functions (see Eq. 10), returns γ to be $3.5 \times 10^{-4} \text{ N m}^{-1}$, which lies comfortably within the range reported for dry, loose dust and sand particles (Shao and Lu, 2000; Kok et al., 2012). This confirms that the reference parameterization is appropriate for the ~~PE~~-polyethylene microspheres. In contrast, applying the same parameter constraints to the TWPs clearly underestimates the measure thresholds. Even when γ is pushed to the upper limit of the empirical range $5.0 \times 10^{-4} \text{ N m}^{-1}$, the predicted fluid threshold curve remains below the observations, indicating that the unmodified Shao and Lu formulation does not fully capture the detachment behaviour of TWPs. Allowing γ to vary freely improves the fit, but the resulting value ($1.6 \times 10^{-3} \text{ N m}^{-1}$) is about 3 times the upper limit proposed for the natural dust and sand particles ($\gamma = 1.65 \times 10^{-4}$ to $5 \times 10^{-4} \text{ N m}^{-1}$; Shao and Lu (2000)). Such a magnitude is difficult to reconcile with independent estimates of cohesive interparticle forces, including van der Waals forces for dry particles and typical polymeric surfaces and would imply a strong cohesive contribution even in the size range where cohesion already dominates ($D_e < 75 \mu\text{m}$). Meanwhile, when both A_N and γ are treated as free parameters, the fitted curve recovers the expected increase in the fluid threshold with particle size in the gravity-dominated regime. The best fit values ($A_N = 0.25$ and $\gamma = 1.0 \times 10^{-4} \text{ N m}^{-1}$), remain within the physically plausible bounds but require a substantially larger aerodynamic efficiency parameter. Similar variations in dimensionless threshold coefficients have been reported in aeolian studies, where analogous parameters (A_B, A_{ft}) vary with particle threshold Reynolds number (Re_{*t}), bed roughness, interparticle forces, and moisture effects (Iversen and White, 1982; Bagnold, 2012; Shao and Lu, 2000; Kok et al., 2012; Dong et al., 2007). In this

600 context, the higher A_N for TWPs can be interpreted as an effective parameter that reflects morphological irregularity, multiple particle contact points with substrate, and micro-roughness.

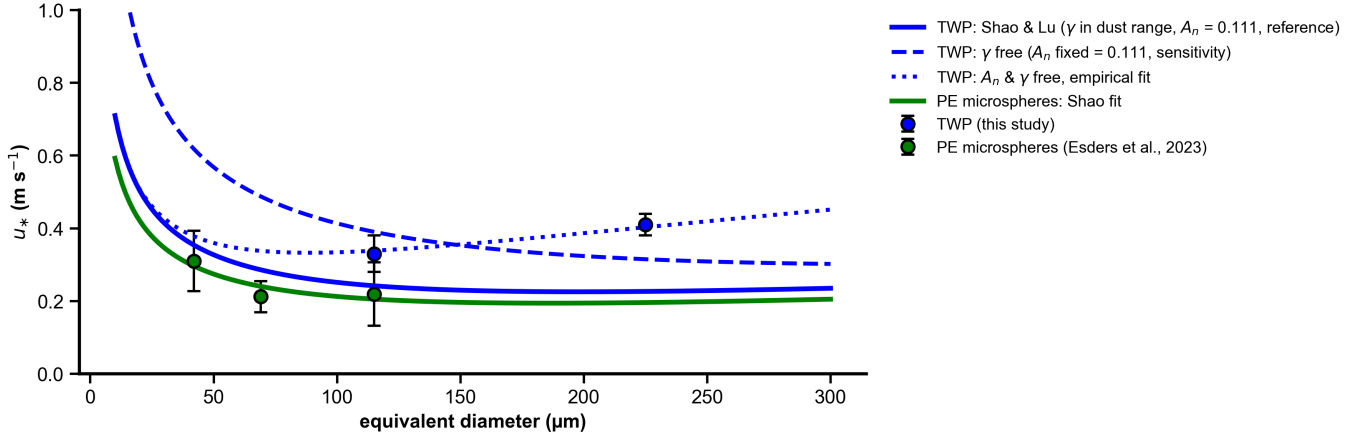


Figure 15. shows the threshold friction velocity u_*^{th} as a function of projected equivalent diameter D_e for TWPs (blue circles), and **PE polyethylene** microspheres (green circles; data from Esders et al. (2023)) on glass substrate. Error bars denote ± 1 SD). The solid blue line shows the Shao Lu model fit with dust parameter range, the dashed blue line shows a fit with A_N fixed and (γ) adjusted, and the dotted blue line shows the fit with both A_N and (γ) adjusted. The solid green line is the Shao and Lu fit for the **PE polyethylene** microsphere data.

Regardless of the calibration strategy, the TWP curve consistently lies above the **PE polyethylene** microsphere curve. The density difference between TWPs and **PE polyethylene** microspheres is too small to account for this offset alone. Within the Shao and Lu threshold framework, such a density contrast would influence the predicted threshold friction velocity less than 10 %, whereas the measured thresholds differ by up to a factor of two. This observation aligns with previous studies (Del Bello et al., 2021; Olivares et al., 2024) which emphasize that particle geometry and roughness enhance the effective adhesion strength of irregularly shaped particles compared to smooth, spherical grains of similar size. In contrast, for particles of comparable size, Esders et al. (2023) reported only a 29 % increase in threshold friction velocity between **PE polyethylene** and borosilicate microspheres, whereas the ~~corresponding difference between PE~~ corresponding difference between this polyethylene microspheres and TWPs in the present study is about 57 %. The approximately twofold larger offset observed suggests that density alone cannot account for the higher thresholds observed for TWPs. similarly, a minor role of density within a restricted parameter range has been reported for particle resuspension under different forcing conditions (Valenzuela-Aracena et al., 2019). Given the limited number of size bins available for the TWPs, the present calibrated parameters should be regarded as a first step toward evaluating the Shao and Lu framework for TWPs. However, no robust TWP dataset was available at equivalent diameters around 10 – 30 μm , which limits direct evaluation of the small particle regime where cohesive effects are expected to be increasingly important. Nevertheless, the present results reveal two robust findings from our idealized experiment: TWPs on smooth glass require considerably higher fluid thresholds than **PE polyethylene** microspheres of comparable size, and the

magnitude of this offset is best explained by enhanced effective cohesion and reduced aerodynamic leverage arising from TWP morphology rather than by density differences.

620 4 Conclusions

This study presents a quantitative framework to investigate the detachment behaviour of near-monolayer deposits of tyre wear particles (TWPs) in the 80 – 300 μm size range from an idealized glass substrate, by combining deep learning-based image analysis with an optimized pressurized seeding technique for controlled particle deposition. Overall, our experiment shows that a bulk threshold friction velocity of 0.26 m s^{-1} is required for TWP detachment, showing a clear increase with larger projected
625 particle size and increasing shape irregularity. Under similar surface shear, coarser and more angular particles tend to remain attached, while smaller and more rounded fragments are more readily mobilized, implying that surface stress preferentially entrains finer and more rounded particles rather than removing all deposited sizes and shapes uniformly. Comparison with [PE polyethylene](#) microspheres of similar size corroborates this interpretation and demonstrates that density differences alone cannot account for the higher fluid thresholds observed; instead, particle morphology and strong surface adhesion emerge as the
630 dominant controls on TWP detachment. These findings challenge the spherical particle assumptions embedded in widely used Shao and Lu empirical threshold models and highlight the need to explicitly account for morphology-informed parameterization when representing TWPs and other irregularly shaped microplastics in resuspension schemes. While these results provide fundamental insights into TWP detachment behaviour, they are constrained by the studied size range and the idealized nature of pristine test stand TWPs on glass substrates. Hence, the work presented here should be regarded as a first, deliberately idealized
635 step towards identifying the key mechanisms controlling TWP detachment. By using these pristine particles, the study establishes a controlled baseline for examining the effects of particle size, projected shape, and substrate conditions, without adding the complexity of environmental ageing and road-dust constituents. These findings can guide future studies on these aged and real-world tyre and road wear particles, for which weathering, aggregation, chemical heterogeneity, and surface contamination are likely to further modify their detachment behaviour. Future studies should build on the high particle-detection and
640 detachment-quantification accuracy achieved here by extending to broader particle size and density range, including environmentally relevant tyre and road wear particles, and to rougher, more heterogeneous surfaces. Such work should also examine particle motion tracking and transport pathways during mobilisation, including distinguishing incipient motion modes, as well as the role of mechanical perturbations, to better capture behaviour under complex real-world conditions.

Appendix A: Deep learning

645 A1 Evolution of Yolo models

YoloV8 belongs to the family of single-stage deep learning models for object detection and instance segmentation, where object localization and classification are performed in one inference pipeline. Since the model is built around a single-stage pipeline, it has a relatively higher processing speed compared to two-stage detections, such as Faster Region-based Convolution Neural

Network (R-CNN). The input images are divided into grids that predict boundary boxes, confidence scores, and class probabilities. This model incorporates several architectural refinements and contributes to a better trade-off between the detection accuracy and processing speed, which is evident from the comparison of YoloV8 against its predecessors on the default 640px image resolution in Fig. A1, Appendix A, offering better throughput with a similar number of parameters (Jocher et al., 2023; Hussain, 2023).

This model features variants ranging from nano (n) to extra large (x), providing diverse computational and performance requirements. On one hand, YoloV8n has fewer parameters and is optimized to deliver high inference speed with slightly lower accuracy as compared to the other variants. However, as the model progressively increases with depth from YoloV8s, YoloV8m, YoloV8l to YoloV8x, the accuracy increases while incurring more computational cost and higher inference speed, as evidenced by improved mAP scores in Fig. A1, Appendix A. Although larger models achieve superior detection performance, YoloV8n is highly efficient for real-time detection and frame-to-frame analysis, making it the preferred variant for our study.

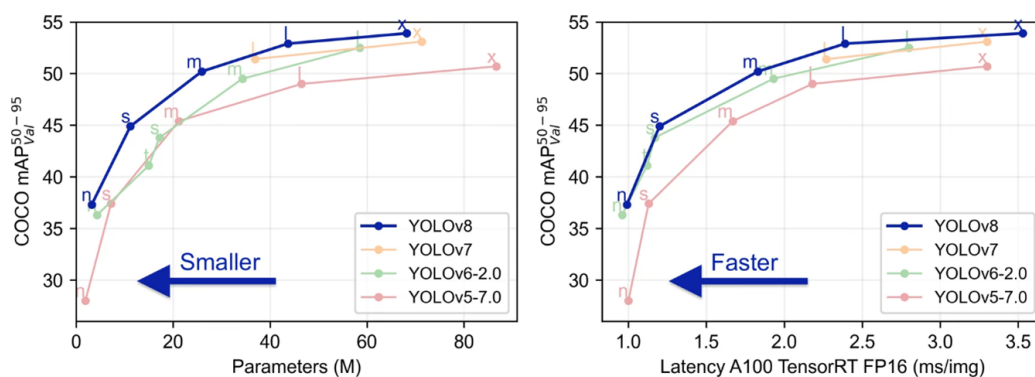


Figure A1. Comparison of the performance of YoloV8 with predecessors. Number of parameters (left), Inference speed (right)

A2 Preprocessing of YoloV8

The pipeline used for YoloV8 image annotation. This semi automated annotation approach was adopted instead of using the manual annotation to extract the YoloV8 txt format labels, which were used for both the training and validation of the model. Here, each raw image was converted to grayscale and then binarized to separate particles from background. The contours were extracted from these binary images, normalized and then converted to the txt format recognized by the model. To increase sample diversity, the raw images were further expanded using a cropping strategy with equal vertical and horizontal strides to produce eight sub-images, which were also subjected to the same cleaning processing.

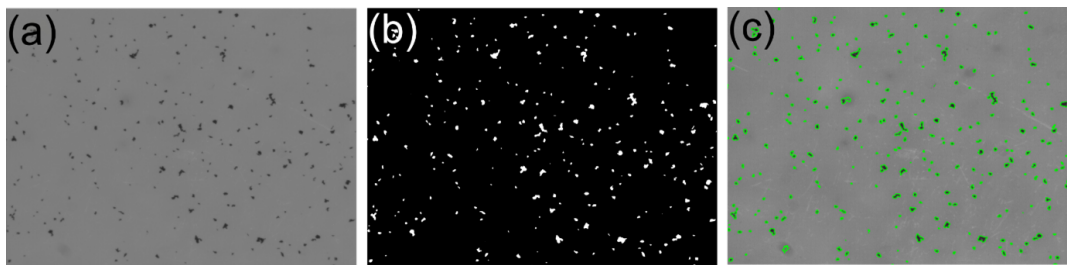


Figure A2. Preprocessing of YoloV8 Images (a) Sample of a raw image before preprocessing (b) Binary thresholding (c) contour outline.

A3 Image segmentation, training and performance evaluation


The model training was performed in three phases to progressively improve the segmentation performance. In phase 1, the model was trained on two class labels, PC (passenger car tyre) and TT (truck tyre), representing a broad range of particle
 670 sizes and shapes. Before training, a grid search based hyperparameter optimisation (20 generations over the parameters listed in Table A1) was performed. Training and validation loss convergence after 50 epochs was monitored to select the optimal configuration. The model was then trained for 1,000 epochs to establish baseline detection performance. Secondly, the model was fine-tuned on a new dataset with a smaller learning rate and reduced epochs, with augmentations removed and multi scale image sizing introduced to expose the network to scale diversity. Finally, the fine-tuned model was further trained on dataset
 675 collected separately from the three seeding approaches.

For performing the model training and optimisation, we use a local workstation that runs on Ubuntu 20.04 LTS operating system equipped with an NVIDIA GeForce RTX 3090 GPU (8GB VRAM), an Intel Xeon W-2295 CPU (18 cores, 36 threads), and PyTorch 1.10 built with CUDA 11.2 and associated dependencies installed in python 3.10 environment. To supplement our
 680 local workstation and expedite model development, we also leveraged the tensor processing unit (TPU) resources of Google Colaboratory (Colab), a free hosted Jupyter notebook environment used in parallel with our internal system to run additional training jobs. Despite using the YoloV8 Nano variant, model training remained computationally expensive. For a representative configuration with 960×960 image size, this TPU setup processed roughly around 0.26 s per batch, whereas the local RTX 3090 processed around 1.2 s per batch, which is about 4 to 5 times slower, and this training execution time varies by the image size, number of epochs, and batch size. In contrast, the inference was relatively cheap, with minimal differences, and
 685 single-image processing took around 25 to 30 ms on Colab and 50 to 60 ms on the local workstation.


Figure A3a and A3b presents the training and validation loss curves for phase 1 and phase 2, with the precision, recall, and mean average precision (mAP) metrics obtained during model development on the TWP datasets. The training losses decreased with epoch, indicating stable optimization during learning. For the validation metrics, there was improvement during the early training stage and then approaches a plateau, before the loss increased at later epochs. This suggest diminishing generalization
 690 gains with prolonged training. According, the model weights corresponding to the best validation performance were selected for subsequent analysis rather than those from the final training epoch.

Table A1. Hyperparameters selected for the proposed model.

Parameter	Phase 1	Phase 2	Phase 3
Epochs	1000	200	50
Batch size	8	8	8
Initial learning rate	0.0001	0.00001	0.00001
Momentum	0.95	0.95	0.95
Weight decay	0.001	0.0005	0.0005
Image size (px)	640	416, 640, 960, 1280	1280
Rotation (°)	10	0	0
Scale factor	0.5	0	0
Translate factor	0	0	0
Mosaic probab	0.6	0	0
Hue factor	0	0	0
Saturation factor	0.5	0	0
Brightness factor	0.5	0	0
Horizontal flip probability	0	0	0
Vertical flip probability	0	0	0

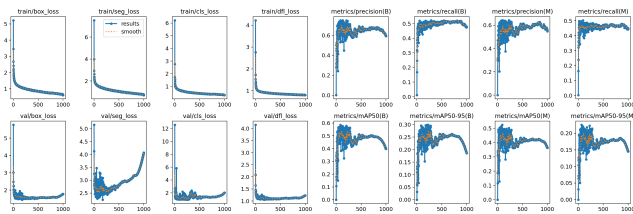

(a) metric evaluation for phase 1

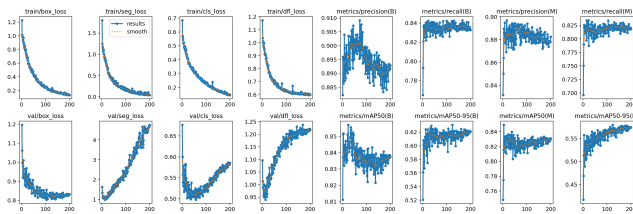

(b) metric evaluation for phase 2

Figure A3. Precision, recall, mean average precision (mAP), and loss plots after training and validation on the TWP dataset

Appendix B: Tyre wear particle characterization

B1 Analytical analysis of the TWPs

The distribution of the car tyre wear particles with different size and shape, analysed using the Microtrac analytical equipment (Microtrac Retsch GmbH, Haan, Germany). This instrument combines laser diffraction with dynamic image analysis for particle characterization. Measurements were conducted in wet mode using deionized water as the mobile phase. A small particle mass (2 - 5 mg) were first mixed with 2 ml of 5 wt. % of tetrasodium pyrophosphate solution and a few drops of Tween® 20 to reduce particle aggregation. This suspension was then transfered into the water filled measuring cell and further diluted with

200 mL of water. To ensure complete particle suspension, the sample was ultrasonicated for 180 s at 40kHz prior to sieving. The
700 datasheet in Appendix B extracted from the analytical measurements were used in Section 2.7 as an independent laboratory
benchmark for comparison with the image-based particle-size distributions obtained from the three seeding methods. The
analyzed particles span approximately 4 to 223 μm and vary from rounded to highly irregular shapes. The corresponding
distribution is characterized by $D_{10} = 94 \mu\text{m}$, $D_{50} = 148 \mu\text{m}$, and $D_{90} = 215 \mu\text{m}$, with a mean sphericity of 0.887 and an
average length-to-width ratio of 1.42.

Particles

SOP Name: H0061img2W_bub.cor Date time: 05.03.2024 12:39:06
Sample name: Sonstige Messungen_SFB 1357_2024_Pass Car 125-200µm
Ticket number: Sort View by: Da [µm]



Figure B1. Size distribution of the Car TWPs.

C1 Post-processing of constant temperature anemometer data using BMMFlux

The constant temperature anemometer (CTA) data were processed using BMMFlux CTA v1.0, a MATLAB-based workflow adapted for wind-tunnel flow measurement. This software is designed to analyze micrometeorological turbulence and flux related data. This version is explicitly configured to characterized high frequency tri-axial CTA measurement data. This software was used to import the raw velocity time series, screen the data, and compute flow and turbulence quantities. The processed output includes the mean velocity components, Reynold stress terms, friction velocity, momentum flux, turbulence kinetic energy, and also to process spectra. The resulting variables were then used to evaluate the wind profile, turbulence flow structure, and friction velocity based quantities applied in the detachment analysis

C2 Flow characterization

Characterization of the vertical flow structure and turbulence in the wind tunnel. Here the mean streamwise velocity and Reynolds shear stress were evaluated across all the ten flow stage. The mean velocity profiles were used to identify the near wall logarithmic region from which the friction velocity (u) and aerodynamic roughness length (z_0) were estimated. On the other hand the Reynold shear stress ($-\overline{u'w'}$) profiles were used to examine the vertical distribution of momentum transfer. Both profiles visibly depicts that the lower part of the flow is governed by roughness generated shear, with the thickness of the internal boundary layer extending around 7 - 8 cm. The turbulence characteristics was computed for the highest flow stage at a height near the wall. The auto-spectra and co-spectra of the velocity components were computed to understand the turbulence scale characteristics obtainable at the highest flow stage in the tunnel. This spectral approach has been widely used in wind-engineering and wind-tunnel studies to estimate integral turbulence length scales (Hui et al., 2009; Kozmar, 2011; TRUSH¹ et al., 2020). In particular, the peak frequency of the longitudinal velocity spectrum can be used to derive the characteristic longitudinal integral scale following the ESDU procedure (ESDU72026, 1972).

$$L_{u,x} = 0.146 \frac{\overline{U}(z)}{f_p} \quad (C1)$$

where $L_{u,x}$ is the longitudinal integral length scale, $\overline{U}(z)$ is the mean streamwise velocity at the measurement height z , and f_p is the peak frequency corresponding to the maximum value in the longitudinal velocity spectrum. From the spectral plot, the extracted peak frequencies show that the dominant turbulent motions differ among the spectral components with uw and uu shifting towards the lowest frequency, compared to vv , ww and vw . This indicates that the streamwise velocity and momentum-carrying motions are associated with larger, lower-frequency structures, whereas the lateral and vertical fluctuations are dominated by smaller, higher-frequency motions. In the inertial sub-range, the normalized spectra and co-spectra decrease with frequency, following the expected slopes of $f^{-2/3}$ and $f^{-4/3}$ for the velocity spectra and Reynolds-stress co-spectra, respectively.

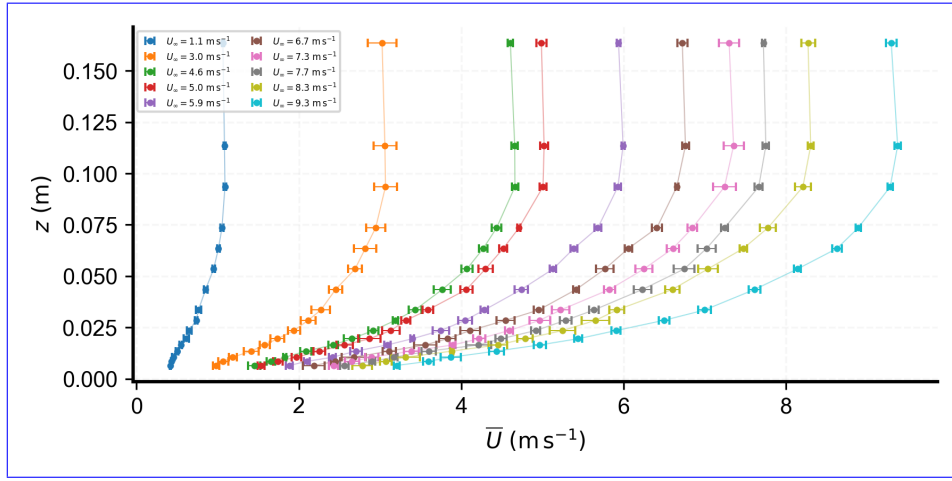


Figure C1. Vertical wind profile of the mean streamwise velocity $\bar{U}$, measured across the ten stepwise flow stages. Symbols represent the mean values at each measurement height, with the error bars indicating the standard deviation across the four replicates. These profiles show the progressive increase in the flow speed with stage.

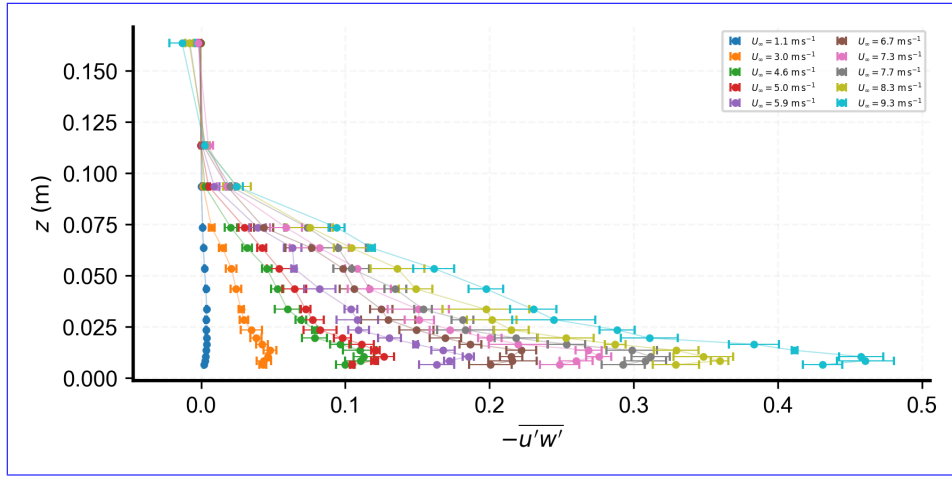


Figure C2. Vertical shear stress profile $-\overline{u'w'}$, measured across the ten flow stages, with symbols representing the mean values and error bars also indicating the standard deviation across four replicates. The magnitude of the shear stress generally increases towards the wall within the roughness-influenced layer, indicating enhanced downward momentum transfer near the surface.

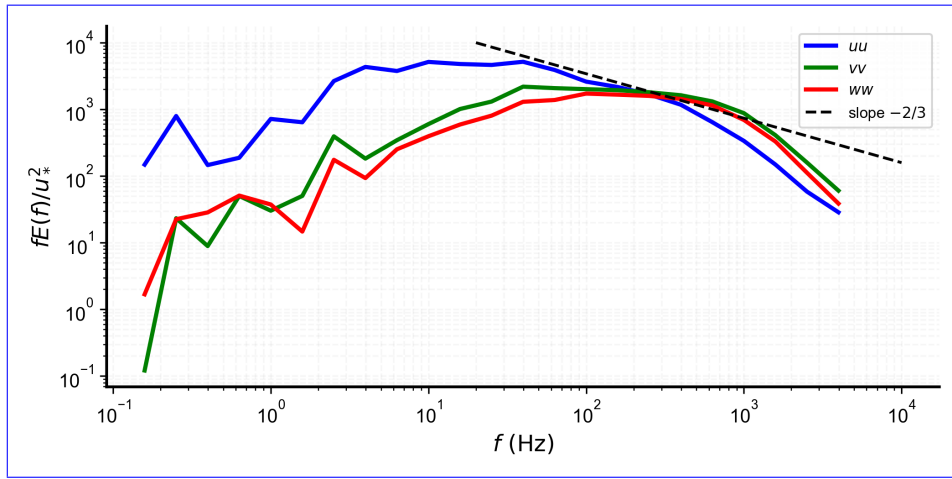


Figure C3. velocity spectra ~~and co-spectra~~, normalized by the the square of the friction velocity, plotted as $fE(f)/u_*^2$ against frequency f . The longitudinal, lateral, and vertical velocity spectra (uu , vv , ww) ~~together with the co-spectra (uw , vw)~~ are shown at the measurement height of $z = 1.4\text{cm}$ for the highest windspeed stage. The dashed line indicates a reference slope of $-2/3$, corresponding to the expected inertial subrange.

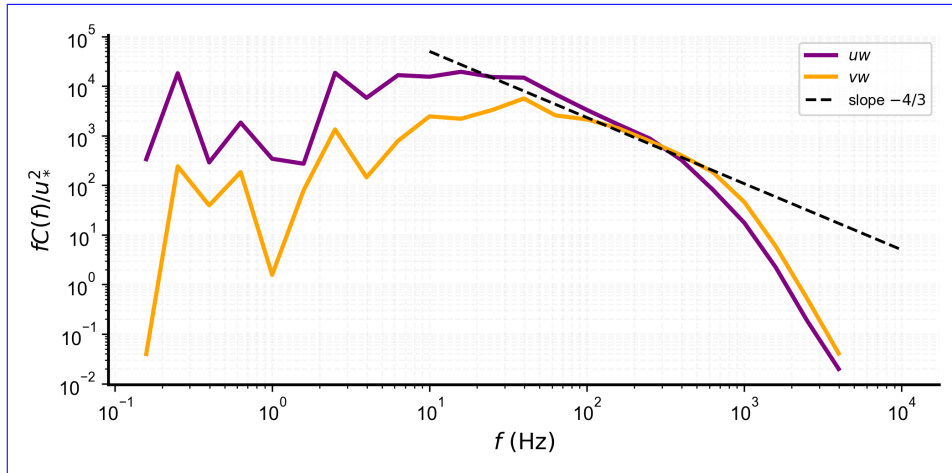


Figure C4. co-spectra normalized by the the square of the friction velocity, plotted as $fC(f)/u_*^2$ against frequency f . The co-spectra (uw , vw) are shown at the measurement height of $z = 1.4\text{cm}$ for the highest windspeed stage. The dashed line indicates a reference slope of $-4/3$, corresponding to the expected inertial subrange.

D1 Detachment protocol

The detachment protocol applied in the experiment were described here. The stepwise velocity time plot illustrate how velocity was increased, ensuring a controlled progression of near wall shear, and used employed for the whole eight replicate experiments. The distribution of the particle detached in relative to the initial population for all the 8 replicates are also shown below.

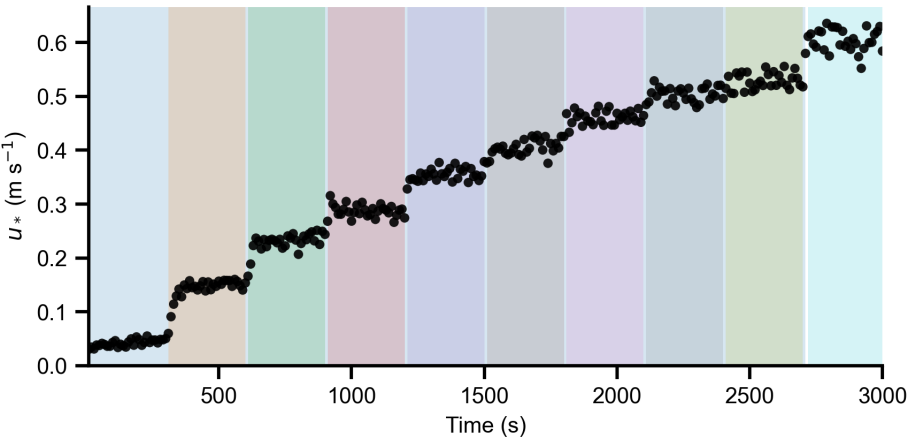


Figure D1. Friction-velocity time series used in the detachment protocol at $z = 1.4$ cm. Black markers show the instantaneous $u_*(t)$, while the shaded background bands denote the successive flow stages. Each stage corresponded to an exposure time of 300 s, followed by a discrete change to the next stage. Stage changes were characterized by a short transient adjustment of u_* before reaching a quasi-steady level within each stage.

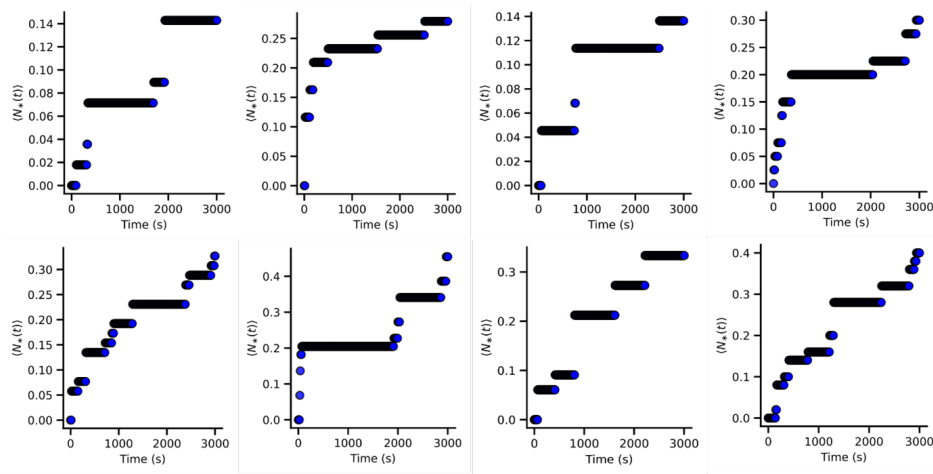


Figure D2. Detached TWP for the eight replicates, showing the detachment fraction over the successive stage wise velocity increment. The spread across replicates illustrate variability in detachment rate despite identical forcing protocol.

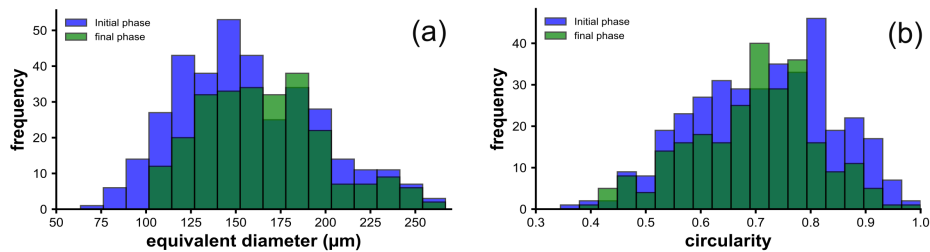


Figure D3. Comparison of particle morphology distribution at initial and final phase of detachment. (a) projected equivalent diameter (b) circularity. Blue histograms represent the initial deposited population (initial phase), while the green histograms represent the particles remaining at the end of the detachment experiment (final phase). The shift in the final distributions relative to the initial population, indicating selective detachment with respect to morphology. Larger particle size remained attached, whereas more rounded (higher circularity) particles were preferentially detached.

Code and data availability. The training and detachment image data, including the dataset generated and analyzed during the study, are available at <https://doi.org/10.5281/zenodo.20589718>.

Author contributions. B.O.A conceived the project with C.K.T, conducted the wind tunnel experiments, designed the instrumental setup, analysed the data, and wrote the manuscript. J.O assisted with instrumental preparation with input from C.K.T and W.B. J.B and C.L provided material assistance. C.K.T, W.B, and A.N supervised the revision of the research and manuscript. D.W and S.A provided reference materials. All authors further read and commented on the paper.

Competing interests. The authors declare that they have no conflict of interest.

Acknowledgements. We gratefully acknowledge financial support from the Deutsche Forschungsgemeinschaft (DFG, German Research Foundation) through the Collaborative Research Center (project numbers 391977956–SFB 1357 and 491183248). We thank Mathias Schott
750 for his assistance with the scanning electron microscopic imaging of the passenger car tyre wear particles (TWPs). We also thank Continental GmbH for their collaboration with the SFB Microplastics group and for providing the test stand-generated TWPs used in this study.

References

- Arthur, C., Baker, J., and Bamford, H.: Proceedings of the international research workshop on the occurrence, effects, and fate of microplastic marine debris, September 9-11, 2008, Tech. rep., 2009.
- 755 Astorayme, M. A., Vázquez-Rowe, I., and Kahhat, R.: The use of artificial intelligence algorithms to detect macroplastics in aquatic environments: A critical review, *Science of The Total Environment*, 945, 173 843, 2024.
- Ayinde, B. O., Musa, M. R., and Ayinde, A.-A. O.: Application of machine learning models and landsat 8 data for estimating seasonal pm 2.5 concentrations, *Environmental Analysis, Health and Toxicology*, 39, e2024 011, 2024.
- Ayinde, B. O., Babel, W., Olesch, J., Agarwal, S., Wagner, D., Nölscher, A., and Thomas, C.: Quantifying the detachment dynamics of
760 microplastic car tire-wear particles using a deep learning framework in a laboratory wind tunnel., Tech. rep., Copernicus Meetings, 2025.
- Baensch-Baltruschat, B., Kocher, B., Stock, F., and Reifferscheid, G.: Tyre and road wear particles (TRWP)-A review of generation, properties, emissions, human health risk, ecotoxicity, and fate in the environment, *Science of the total Environment*, 733, 137 823, 2020.
- Bagnold, R. A.: *The physics of blown sand and desert dunes*, Courier Corporation, 2012.
- Barth, T., Preuß, J., Müller, G., and Hampel, U.: Single particle resuspension experiments in turbulent channel flows, *Journal of Aerosol
765 Science*, 71, 40–51, 2014.
- Beattie, N. S., Moir, R. S., Chacko, C., Buffoni, G., Roberts, S. H., and Pearsall, N. M.: Understanding the effects of sand and dust accumulation on photovoltaic modules, *Renewable Energy*, 48, 448–452, 2012.
- Beji, A., Deboudt, K., Muresan, B., Khardi, S., Flament, P., Fourmentin, M., and Lumiere, L.: Physical and chemical characteristics of particles emitted by a passenger vehicle at the tire-road contact, *Chemosphere*, 340, 139 874, 2023.
- 770 Benali Amjoud, A. and Amrouch, M.: Convolutional neural networks backbones for object detection, in: *Image and Signal Processing: 9th International Conference, ICISP 2020, Marrakesh, Morocco, June 4–6, 2020, Proceedings 9*, pp. 282–289, Springer, 2020.
- Bigalke, M., Fieber, M., Foetisch, A., Reynes, J., and Tollan, P.: Microplastics in agricultural drainage water: a link between terrestrial and aquatic microplastic pollution, *Science of the total environment*, 806, 150 709, 2022.
- Bondorf, L., Löber, M., Grein, T., Köhler, L., Eppe, F., Schripp, T., Aigner, M., and Philipps, F.: Characterization of airborne tire particle
775 emissions under realistic conditions on the chassis dynamometer, on the test track, and on the road, *Aerosol Science and Technology*, 59, 623–634, 2025.
- Braaten, D., Shaw, R., et al.: Particle resuspension in a turbulent boundary layer-observed and modeled, *Journal of Aerosol Science*, 21, 613–628, 1990.
- Cadle, S. and Williams, R.: Gas and particle emissions from automobile tires in laboratory and field studies, *Journal of the Air Pollution
780 Control Association*, 28, 502–507, [https://doi.org/https://doi.org/10.1080/00022470.1978.10470623](https://doi.org/10.1080/00022470.1978.10470623), 1978.
- Chanchangi, Y. N., Ghosh, A., Sundaram, S., and Mallick, T. K.: An analytical indoor experimental study on the effect of soiling on PV, focusing on dust properties and PV surface material, *Solar Energy*, 203, 46–68, 2020.
- Chazhoor, A. A. P., Ho, E. S., Gao, B., and Woo, W. L.: Deep transfer learning benchmark for plastic waste classification, *Intelligence & Robotics*, 2, 1–19, 2022.
- 785 Chepil, W.: Dynamics of wind erosion: I. Nature of movement of soil by wind, *Soil Science*, 60, 305–320, 1945.
- Cox, E.: A method of assigning numerical and percentage values to the degree of roundness of sand grains, *Journal of paleontology*, 1, 179–183, 1927.

- Del Bello, E., Taddeucci, J., Merrison, J. P., Rasmussen, K. R., Andronico, D., Ricci, T., Scarlato, P., and Iversen, J. J.: Field-based measurements of volcanic ash resuspension by wind, *Earth and Planetary Science Letters*, 554, 116 684, 2021.
- 790 Dong, Z., Mu, Q., and Liu, X.: Defining the threshold wind velocity for moistened sediments, *Journal of Geophysical Research: Solid Earth*, 112, 2007.
- Esders, E. M., Georgi, C., Babel, W., and Thomas, C.: Quantitative detection of aerial suspension of particles with a full-frame visual camera for atmospheric wind tunnel studies, *Aerosol Science and Technology*, 56, 530–544, 2022.
- Esders, E. M., Sittl, S., Krammel, I., Babel, W., Papastavrou, G., and Thomas, C. K.: Is transport of microplastics different from mineral
795 particles? Idealized wind tunnel studies on polyethylene microspheres, *Atmospheric Chemistry and Physics*, 23, 15 835–15 851, 2023.
- ESDU72026: Characteristics of wind speed in the lower layers of the atmosphere near the ground: strong winds (neutral atmosphere), 1972.
- Fang, C. and Sill, B.: Aerodynamic roughness length: correlation with roughness elements, *Journal of Wind Engineering and Industrial Aerodynamics*, 41, 449–460, 1992.
- Firdauz, S. S., Rachmawati, E., and Sulistiyo, M. D.: Mask Detection on Motorcyclists Using YOLOv4, *Building of Informatics, Technology
800 and Science (BITS)*, 4, 2023.
- Foken, T. and Mauder, M.: *Micrometeorology*, vol. 2, Springer, 2008.
- Garratt, J. R.: The atmospheric boundary layer, *Earth-Science Reviews*, 37, 89–134, 1994.
- Goossens, D. and Van Kerschaever, E.: Aeolian dust deposition on photovoltaic solar cells: the effects of wind velocity and airborne dust concentration on cell performance, *Solar energy*, 66, 277–289, 1999.
- 805 Gregory, M. R.: Plastic ‘scrubbers’ in hand cleansers: a further (and minor) source for marine pollution identified, *Marine pollution bulletin*, 32, 867–871, 1996.
- Grigoratos, T. and Martini, G.: Brake wear particle emissions: a review, *Environmental science and pollution research*, 22, 2491–2504, 2015.
- Gualtieri, M., Andrioletti, M., Mantecca, P., Vismara, C., and Camatini, M.: Impact of tire debris on in vitro and in vivo systems, *Particle and fibre toxicology*, 2, 1–14, 2005.
- 810 Gunawardana, C., Goonetilleke, A., Egodawatta, P., Dawes, L., and Kokot, S.: Source characterisation of road dust based on chemical and mineralogical composition, *Chemosphere*, 87, 163–170, 2012.
- Hajdowska, K., Student, S., and Borys, D.: Graph based method for cell segmentation and detection in live-cell fluorescence microscope imaging, *Biomedical Signal Processing and Control*, 71, 103 071, 2022.
- Hesse, D., Feißel, T., Kunze, M., Bachmann, E., Bachmann, T., and Gramstat, S.: Comparison of methods for sampling particulate emissions
815 from tires under different test environments, *Atmosphere*, 13, 1262, 2022.
- Hillenbrand, T., Toussaint, D., Böhm, E., Fuchs, S., Scherer, U., Rudolphi, A., Hoffmann, M., Kreißig, J., and Kotz, C.: Einträge von Kupfer, Zink und Blei in Gewässer und Böden, 2005.
- Horton, A. A. and Dixon, S. J.: Microplastics: An introduction to environmental transport processes, *Wiley Interdisciplinary Reviews: Water*, 5, e1268, 2018.
- 820 Hu, R., Johnson, P. L., and Meneveau, C.: Modeling the resuspension of small inertial particles in turbulent flow over a fractal-like multiscale rough surface, *Physical Review Fluids*, 8, 024 304, 2023.
- Hui, M., Larsen, A., and Xiang, H.: Wind turbulence characteristics study at the Stonecutters Bridge site: Part I—Mean wind and turbulence intensities, *Journal of Wind Engineering and Industrial Aerodynamics*, 97, 22–36, 2009.
- Hussain, M.: YOLO-v1 to YOLO-v8, the rise of YOLO and its complementary nature toward digital manufacturing and industrial defect
825 detection, *Machines*, 11, 677, 2023.

- Ibrahim, A., Dunn, P., and Brach, R.: Microparticle detachment from surfaces exposed to turbulent air flow: controlled experiments and modeling, *Journal of aerosol science*, 34, 765–782, 2003.
- Iversen, J. D. and White, B. R.: Saltation threshold on earth, mars and venus, *Sedimentology*, 29, 111–119, 1982.
- Järlskog, I., Jaramillo-Vogel, D., Rausch, J., Gustafsson, M., Strömvall, A.-M., and Andersson-Sköld, Y.: Concentrations of tire wear microplastics and other traffic-derived non-exhaust particles in the road environment, *Environment international*, 170, 107 618, 2022.
- 830 Jia, T., Peng, Z., Yu, J., Piaggio, A. L., Zhang, S., and de Kreuk, M. K.: Detecting the interaction between microparticles and biomass in biological wastewater treatment process with Deep Learning method, *Science of the Total Environment*, 951, 175 813, 2024.
- Jiang, L., Fan, G., Li, Z., Kai, X., Zhang, D., Chen, Z., Humphries, S., Heness, G., and Yeung, W. Y.: An approach to the uniform dispersion of a high volume fraction of carbon nanotubes in aluminum powder, *Carbon*, 49, 1965–1971, 2011.
- 835 Jocher, G., Chaurasia, A., and Qiu, J.: YOLO by Ultralytics, 2023.
- Kassab, A. S., Ugaz, V. M., King, M. D., and Hassan, Y. A.: High resolution study of micrometer particle detachment on different surfaces, *Aerosol Science and Technology*, 47, 351–360, 2013.
- Kernchen, S., Schmalz, H., Löder, M. G., Georgi, C., Einhorn, A., Greiner, A., Nölscher, A. C., Laforsch, C., and Held, A.: Atmospheric deposition studies of microplastics in Central Germany, *Air Quality, Atmosphere & Health*, 17, 2247–2261, 2024.
- 840 Kim, J., Yang, S. I., Moon, H., Hong, J., Hong, J., Choi, W., Son, H., Lee, B.-c., Kim, G.-B., and Kim, Y.: Potential release of nano-carbon black from tire-wear particles through the weathering effect, *Journal of Industrial and Engineering Chemistry*, 96, 322–329, 2021.
- Kim, Y., Wellum, G., Mello, K., Strawhecker, K. E., Thoms, R., Giaya, A., and Wyslouzil, B. E.: Effects of relative humidity and particle and surface properties on particle resuspension rates, *Aerosol Science and Technology*, 50, 339–352, 2016.
- Klöckner, P., Seiwert, B., Weyrauch, S., Escher, B. I., Reemtsma, T., and Wagner, S.: Comprehensive characterization of tire and road wear
- 845 particles in highway tunnel road dust by use of size and density fractionation, *Chemosphere*, 279, 130 530, 2021.
- Kok, J. F., Parteli, E. J., Michaels, T. I., and Karam, D. B.: The physics of wind-blown sand and dust, *Reports on progress in Physics*, 75, 106 901, 2012.
- Kouadio, E. K., Goriaux, M., Laguionie, P., and Ruban, V.: Metal particle seeding on urban surface samples, *Environmental Science and Pollution Research*, 29, 30 837–30 849, 2022.
- 850 Kozmar, H.: Characteristics of natural wind simulations in the TUM boundary layer wind tunnel, *Theoretical and applied climatology*, 106, 95–104, 2011.
- Kreider, M. L., Panko, J. M., McAtee, B. L., Sweet, L. I., and Finley, B. L.: Physical and chemical characterization of tire-related particles: Comparison of particles generated using different methodologies, *Science of the Total Environment*, 408, 652–659, 2010.
- Laermanns, H., Lehmann, M., Klee, M., J. Löder, M. G., Gekle, S., and Bogner, C.: Tracing the horizontal transport of microplastics on
- 855 rough surfaces, *Microplastics and Nanoplastics*, 1, 1–12, 2021.
- Laforsch, C., Ramsperger, A. F., Mondellini, S., and Galloway, T. S.: Microplastics: a novel suite of environmental contaminants but present for decades, *Regulatory toxicology*, pp. 1185–1210, 2021.
- Laglbauer, B. J., Franco-Santos, R. M., Andreu-Cazenave, M., Brunelli, L., Papadatou, M., Palatinus, A., Grego, M., and Deprez, T.: Macrodebris and microplastics from beaches in Slovenia, *Marine pollution bulletin*, 89, 356–366, 2014.
- 860 Lee, Y., Lee, C., Lee, H.-J., and Kim, J.-S.: Fast detection of objects using a YOLOv3 network for a vending machine, in: 2019 IEEE International Conference on Artificial Intelligence Circuits and Systems (AICAS), pp. 132–136, IEEE, 2019.
- Li, H., Yang, S., Zhang, R., Yu, P., Fu, Z., Wang, X., Kadoch, M., and Yang, Y.: Detection of floating objects on water surface using YOLOv5s in an edge computing environment, *Water*, 16, 86, 2023.

- Liang, C., Jia, Z., and Chen, R.: An automated particle size analysis method for SEM images of powder coating particles, *Coatings*, 13, 1547, 2023.
- Lim, J., Shin, G., and Shin, D.: Fast detection and classification of microplastics below 10 μm using CNN with Raman spectroscopy, *Analytical Chemistry*, 96, 6819–6825, 2024.
- Lim, Y. K., Lee, C. H., Lee, K.-W., Hong, S. H., and Baek, S. H.: Impact of Heterosigma akashiwo on the environmental behavior of microplastics: Aggregation, sinking, and resuspension dynamics, *Journal of Hazardous Materials*, 487, 137 242, 2025.
- Liu, Z., Zheng, C., Wu, Y., Flay, R. G., and Zhang, K.: Wind tunnel simulation of wind flows with the characteristics of thousand-meter high ABL, *Building and Environment*, 152, 74–86, 2019.
- Loth, E.: Compressibility and rarefaction effects on drag of a spherical particle, *AIAA journal*, 46, 2219–2228, 2008.
- Luke, J., Joseph, R., and Balaji, M.: Impact of image size on accuracy and generalization of convolutional neural networks, *Int. J. Res. Anal. Rev.(IJRAR)*, 6, 70–80, 2019.
- Luo, Z., Zhou, X., Su, Y., Wang, H., Yu, R., Zhou, S., Xu, E. G., and Xing, B.: Environmental occurrence, fate, impact, and potential solution of tire microplastics: Similarities and differences with tire wear particles, *Science of the Total Environment*, 795, 148 902, 2021.
- Marsh, B. P., Chada, N., Sanganna Gari, R. R., Sigdel, K. P., and King, G. M.: The Hessian blob algorithm: Precise particle detection in atomic force microscopy imagery, *Scientific reports*, 8, 978, 2018.
- Marwood, C., McAtee, B., Kreider, M., Ogle, R. S., Finley, B., Sweet, L., and Panko, J.: Acute aquatic toxicity of tire and road wear particles to alga, daphnid, and fish, *Ecotoxicology*, 20, 2079–2089, 2011.
- Mennekes, D. and Nowack, B.: Tire wear particle emissions: measurement data where are you?, *Science of The Total Environment*, 830, 154 655, 2022.
- Messer, C., Khurana, R., and Bedi, S.: Classification of Uncertainty in Nuclei Segmentation From H&E Images, *Tech. rep.*, 2024.
- Olivares, M. V., Benito, J., Silin, N., Uñac, R., and Vidales, A.: Aerodynamic resuspension of irregular flat micro-particles, *Journal of Aerosol Science*, 181, 106 418, 2024.
- Osuoha, J. O., Anyanwu, B. O., and Ejileugha, C.: Pharmaceuticals and personal care products as emerging contaminants: Need for combined treatment strategy, *Journal of hazardous materials advances*, 9, 100 206, 2023.
- Piehl, S., Leibner, A., Löder, M. G., Dris, R., Bogner, C., and Laforsch, C.: Identification and quantification of macro-and microplastics on an agricultural farmland, *Scientific reports*, 8, 17 950, 2018.
- Prume, J. A., Gorka, F., and Löder, M. G.: From sieve to microscope: an efficient technique for sample transfer in the process of microplastics' quantification, *MethodsX*, 8, 101 341, 2021.
- Qasem, H., Betts, T. R., Mullejans, H., AlBusairi, H., and Gottschalg, R.: Effect of dust shading on photovoltaic modules, in: *Effect of dust shading on photovoltaic modules*, Loughborough University, 2011.
- Shao, Y.: *Physics and modelling of wind erosion*, Springer, 2008.
- Shao, Y. and Li, A.: Numerical modelling of saltation in the atmospheric surface layer, *Boundary-Layer Meteorology*, 91, 199–225, 1999.
- Shao, Y. and Lu, H.: A simple expression for wind erosion threshold friction velocity, *Journal of Geophysical Research: Atmospheres*, 105, 22 437–22 443, 2000.
- Sharma, M. M., Chamoun, H., Sarma, D. S. R., and Schechter, R. S.: Factors controlling the hydrodynamic detachment of particles from surfaces, *Journal of colloid and interface science*, 149, 121–134, 1992.
- Sommer, F., Dietze, V., Baum, A., Sauer, J., Gilge, S., Maschowski, C., and Gieré, R.: Tire abrasion as a major source of microplastics in the environment, *Aerosol and air quality research*, 18, 2014–2028, 2018.

- Sundt, P., Schulze, P.-E., and Syversen, F.: Sources of microplastic-pollution to the marine environment, Mepex for the Norwegian Environment Agency, 86, 20, 2014.
- Thammasanya, T., Patiam, S., Rodcharoen, E., and Chotikarn, P.: A new approach to classifying polymer type of microplastics based on
 905 Faster-RCNN-FPN and spectroscopic imagery under ultraviolet light, *Scientific reports*, 14, 3529, 2024.
- Theron, F., Debba, D., and Le Coq, L.: Local experimental methodology for the study of microparticles resuspension in ventilated duct during fan acceleration, *Journal of Aerosol Science*, 140, 105477, 2020.
- Thomas, C. K., Law, B. E., Irvine, J., Martin, J. G., Pettijohn, J. C., and Davis, K. J.: Seasonal hydrology explains interannual and seasonal variation in carbon and water exchange in a semiarid mature ponderosa pine forest in central Oregon, *Journal of Geophysical Research: Biogeosciences*, 114, 2009.
 910
- TRUSH¹, A., POSPÍŠIL¹, S., and Kozmar, H.: Comparison of turbulence integral length scale determination methods, *Advances in Fluid Mechanics XIII*, 128, 113, 2020.
- Turner, A. and Rice, L.: Toxicity of tire wear particle leachate to the marine macroalga, *Ulva lactuca*, *Environmental Pollution*, 158, 3650–3654, 2010.
- 915 Valenzuela-Aracena, K., Oger, L., Unac, R. O., and Vidales, A. M.: Resuspension due to vertical oscillations: experiments and numerical modeling: K. Valenzuela-Aracena et al., *Granular Matter*, 21, 51, 2019.
- van Calcar, C. v. and van Emmerik, T. v.: Abundance of plastic debris across European and Asian rivers, *Environmental Research Letters*, 14, 124051, 2019.
- Wang, H.-C.: Effects of inceptive motion on particle detachment from surfaces, *Aerosol Science and Technology*, 13, 386–393, 1990.
- 920 Wik, A., Lycken, J., and Dave, G.: Sediment quality assessment of road runoff detention systems in Sweden and the potential contribution of tire wear, *Water, air, and soil pollution*, 194, 301–314, 2008.
- Xu, J. and Wang, Z.: Efficient and accurate microplastics identification and segmentation in urban waters using convolutional neural networks, *Science of The Total Environment*, 911, 168696, 2024.
- Xu, S., Tang, H., Li, J., Wang, L., Zhang, X., and Gao, H.: A yolow algorithm of water-crossing object detection, *Applied Sciences*, 13, 8890,
 925 2023.
- You, S. and Wan, M. P.: A new turbulent-burst-based model for particle resuspension from rough surfaces in turbulent flow, *Aerosol Science and Technology*, 48, 1031–1042, 2014.
- Zailan, N. A., Azizan, M. M., Hasikin, K., Mohd Khairuddin, A. S., and Khairuddin, U.: An automated solid waste detection using the optimized YOLO model for riverine management, *Frontiers in public health*, 10, 907280, 2022.
- 930 Zeng, T., Zhu, Y., and Lam, E. Y.: Deep learning for digital holography: a review, *Optics express*, 29, 40572–40593, 2021.
- Zhang, Z., Li, P., Hu, W., Li, J., Li, H., Wang, R., Li, Q., Zou, X., Zhou, B., Chang, C., et al.: Electric forces can enhance the emission of microplastics into air, *Environmental Pollution*, p. 126405, 2025.
- Zhao, S., Zhou, H., and Yang, H.: Smart Monitoring Method for Land-Based Sources of Marine Outfalls Based on an Improved YOLOv8 Model, *Water*, 16, 3285, 2024.
- 935 Zhu, Y., Yeung, C. H., and Lam, E. Y.: Microplastic pollution monitoring with holographic classification and deep learning, *Journal of Physics: Photonics*, 3, 024013, 2021.